
Oh!_P E27

Pendelleuchte | 220-240 V | 1xE27
12105







Technische Daten	
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
Anschluss der Leuchte	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2,5 m
Harzbeschichtung	Nein
Nettogewicht	4.275 Kg

Oberfläche Oberfläche Gehäuse	
Material	PE
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Weiß RAL 9010 Matt
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | 1xE27
12105

Double emission pendant luminaires for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of pe and features a white finish; the diffuser is made of pe; the mounting frame is made of iron, with a ral 9010 white matte finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 4.275 kg.


The power supply cable is included and features a 2,5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	79 %
Leuchten Lichtstrom	555 lm
Consumption	46 W
Leuchten Lichtausbeute	15 lm/W
Verbindungstemperatur (Leuchte)	80
Lichtstrom (Lichtquelle)	1 x lm

OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical

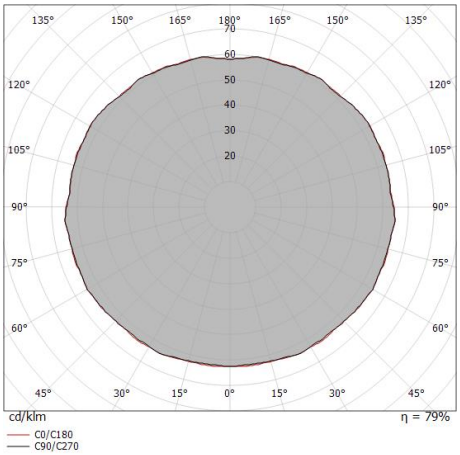

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Oh!_P E27

Pendelleuchte | 220-240 V | 1xE27

12105

Double emission pendant luminaires for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of pe and features a white finish; the diffuser is made of pe; the mounting frame is made of iron, with a ral 9010 white matte finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 4.275 kg.

The power supply cable is included and features a 2,5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.