
Gypsum_Wf4

Wandleuchten - Step-Leuchten | 220-240 V | 48 topLED 6 W DC - 8 W AC | CRI 90
61390M00





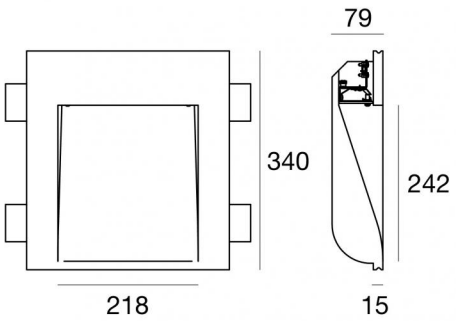

325 x
350

Technische Daten	
Typ	Step-Leuchten
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	6 W DC
Gesamtleistung	8 W
Lichtstrom (Lichtquelle)	666 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	4.2196 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	gesso
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	Glas
Bearbeitungstyp	Sandstrahlen

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten - Step-Leuchten | 220-240 V | 48 topLED 6 W DC - 8 W AC | CRI 90
61390M00

Single emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 48 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 666 lm, with a 111.0 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of glass with a sandblasting treatment.

The ingress protection degree is IP20; the total weight is of 4.2196 kg.

The total absorbed power is 8 W

The device features protection class I and can be wall lights-mounted, with a 325 x 350 mm hole (in plasterboard) with an outer casing, code 61290(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	42 %
Lichtstrom (Lichtquelle)	666 lm
Leuchten Lichtstrom	284 lm
Consumption	8 W
Leuchten Lichtausbeute	35 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

OPTICAL	
Optik C0/C180	121°
Light distribution simmetry	Asymmetrical

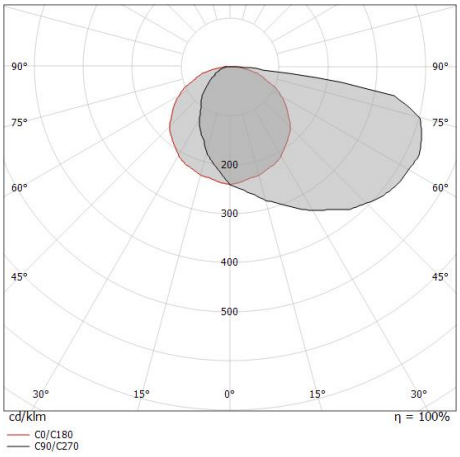


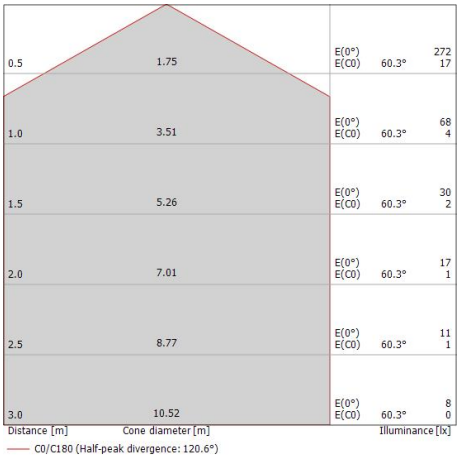

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Gypsum_Wf4 | Step Lights | Accessories
61390M00





Dicken - KIT Dicken für die Montage auf Gipskarton

Code
60830





Einbaugehäuse - Schalung für Beton
Typ Installation: mauerwerk L=390mm, H=462mm, D=84mm.
Material:Eisen, farbe:Zink, bearbeitungstyp :Verzinken.

Code
61290

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.