
Systeme | 198-264 V AC /220-240 V DC
120 + 120 topLED 36 W DC - 40 W AC | Modular | CRI 92
**65469M**



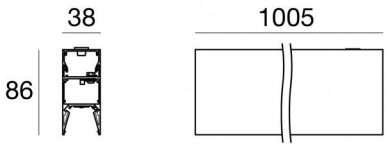


| Technische Daten | |
|---|---|
| Typ | Systeme |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Light emission direction | upward + downward |
| Lampe Nennleistung | 36 W DC |
| Gesamtleistung | 40 W |
| Lichtstrom (Lichtquelle) | 4790 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 92 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP40 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Zweiflammig |
| Nettogewicht | 2.275 Kg |
| Modularity | Modular |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | 1 KV |
| Optiktechnologie | Dot free |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Opal |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme | 198-264 V AC /220-240 V DC | 120 + 120 topLED 36 W DC - 40 W AC | Modular | CRI 92

**65469M**

Double emission systems for indoor application. The super warm white LED light source is composed of 120 topled LEDs with CCT of 2700 K and a CRI 92; the source luminous flux is 2395 lm, with a 133.1 lm/W nominal luminous efficacy The super warm white LED light source is composed of 120 topled LEDs with CCT of 2700 K and a CRI 92; the source luminous flux is 2395 lm, with a 133.1 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP40; the total weight is of 2.275 kg.

The total absorbed power is 40 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Lichtstrom (Lichtquelle) | 4790 lm |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 92 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 494435h (at Tj 65  Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65  Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65  Ta 25 ) |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip35_MP | Systems | Accessories
**65469M**




Hängeleuchten - Suspension kit 2 mt.
Material:Messing OT58, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
64776

---






Diffusor - Opal 5m Länge
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65212

---






Diffusor - Opal 10m Länge
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65213

---






Diffusor - Opal 20m Länge
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65214

---






Diffusor - Opaline diffuser L.50mt
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65215

---






Diffusor - Asymmetric diffuser L.5mt

**Code**
65234

---






Diffusor - Asymmetric diffuser L.10mt

**Code**
65235

---






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64005



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip35_MP | Systems | Accessories
**65469M**






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64015






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64025







Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64035







Endkappe - Kit end caps Rollip35_MP - White
Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
64634






Drahtabdeckung - Power-Kit - Doppelte Emission - On/off
Material:Eisen, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
64649



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.