
Uplights | 1 arrayLED 7.2 W DC 220 mA | CRI 80

**76044M60**

MARINE GRADE



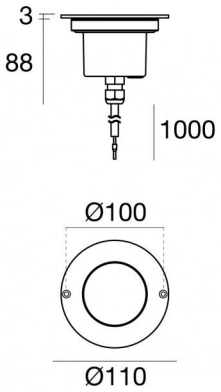


| Technische Daten | |
|---|---|
| Typ | Überrollbar |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | arrayLED |
| Optik | Wide Flood |
| Light emission direction | upward |
| Lampe Nennleistung | 7.2 W DC |
| Lichtstrom (Lichtquelle) | 1153 lm |
| Eingangsspannungsbereich | 220mA |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | CC |
| Isolierklasse | 3 |
| IP | IP68 |
| Installationsbeschränkung | Nicht für Einsatz unter Wasser |
| IK | IK10 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | Ja |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Ja |
| Überrollbarkeit | 3000 Kg |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Ja |
| Einbautiefe | 88 mm |
| Typ Lichtabstrahlung | Einflammig |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Technische Merkmale des Produkts | Acquastop - TVS |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Edelstahl AISI 316L |
| Farbe | Stahl |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Extra-helles Glas |
| Farbe | transparent |
| Bearbeitungstyp | Siebdruck |

| Oberfläche Oberfläche flansch | |
|---|---|
| Material | Edelstahl AISI 316L |
| Farbe | Stahl |
| Bearbeitungstyp | Bürsten |

**Elektronik**



99342
On/Off Driver 198~264V AC (1 art.)



C-E200005
Push and Simply Dim - DALI-2 Controller (1 art.)

| Cables Electrification | |
|---|---|
| Cable connector | No connector - Neoprene 2x1mm² |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Uplights | 1 arrayLED 7.2 W DC 220 mA | CRI 80
**76044M60**

Single emission uplights for outdoor application. The super warm white LED light source with a wide flood light distribution is composed of 1 arrayled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1153 lm, with a 160.1 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.


The device body is made of aisi 316l stainless steel and features a steel finish; the diffuser is made of extra clear glass with a silk-screening treatment. The robust steel structure enhances the fixture's design and ensures long?lasting performance, even in the most demanding environments.The product flange is made of steel, a material that ensures high robustness, superior mechanical strength and extended durability, guaranteeing maximum component reliability over time.


The ingress protection degree is IP68; The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 7.2 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 98134(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

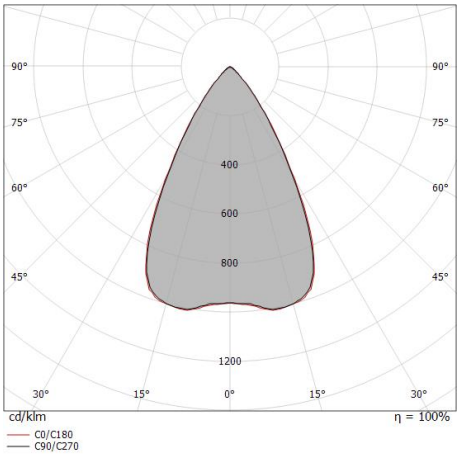

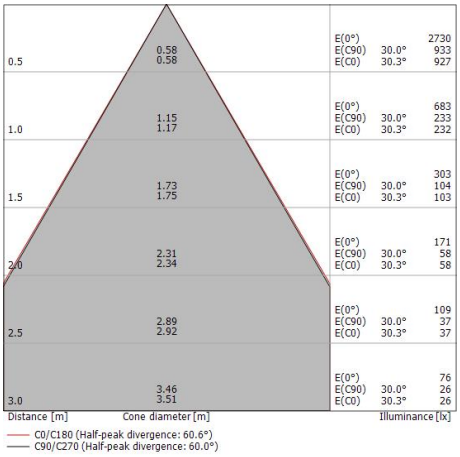
| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 61 % |
| Lichtstrom (Lichtquelle) | 1153 lm |
| Leuchten Lichtstrom | 709 lm |
| Consumption | 7 W |
| Leuchten Lichtausbeute | 101 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 45°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 231262h (at Tj 65 Ta 25 ) |
| L80 B10 C0 144799h (at Tj 65 Ta 25 ) |
| L90 B10 C0 68534h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 18.4 |
| UGR transversal | 18.5 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 60° |
| Light distribution simmetry | Symmetrical |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Suelo316_RXF | Uplights | Accessories
**76044M60**



Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=161mm, H=115mm, D=115mm.
Material:Edelstahl 316L, farbe:Stahl.

**Code**
98134



Stecker - 4 Wege Steckverbinder für IP68 Verbindungen – max. 4×1,5 mm²
Querschnitt 1.5 mm².

**Code**
84894



Stecker - 3-Wege-Anschluss - IP68 Min. 3 x 0,5 mm² / Max. 3 x 1,5 mm²

**Code**
84893



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.