
# Stadium

Wandleuchten | 198-264 V
72 topLED 6.4 W DC - 7.8 W AC | CRI 80
**76078M00**








| Technische Daten | |
|---|---|
| Typ | Oberfläche |
| Installationsposition | Wand - Decke |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | frontal |
| Lampe Nennleistung | 6.4 W DC |
| Gesamtleistung | 7.8 W |
| Lichtstrom (Lichtquelle) | 1192 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 2 |
| IP | IP65 |
| IK | IK10 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.4 Kg |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | 1 KV |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Flüssiglackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Opal |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten | 198-264 V | 72 topLED 6.4 W DC - 7.8 W AC | CRI 80
**76078M00**

Single emission wall lights for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 72 topled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1192 lm, with a 186.3 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a text white ral9003 finish, processed by means of liquid painting; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP65; the total weight is of 0.4 kg.

The total absorbed power is 7.8 W

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D. |


| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 50 % |
| Lichtstrom (Lichtquelle) | 1192 lm |
| Leuchten Lichtstrom | 596 lm |
| Consumption | 7.8 W |
| Leuchten Lichtausbeute | 76 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 494435h (at Tj 65  Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65  Ta 25 ) |
| L90 B10 C0 147856h (at Tj 65  Ta 25 ) |

| **UGR** | |
|---|---|
| UGR axial | 24.6 |
| UGR transversal | 24.3 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 113° |
| Light distribution simmetry | Symmetrical |

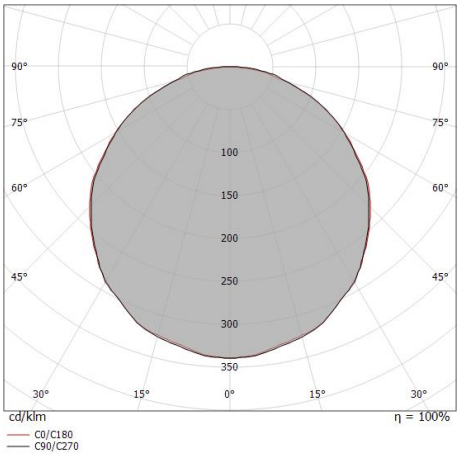

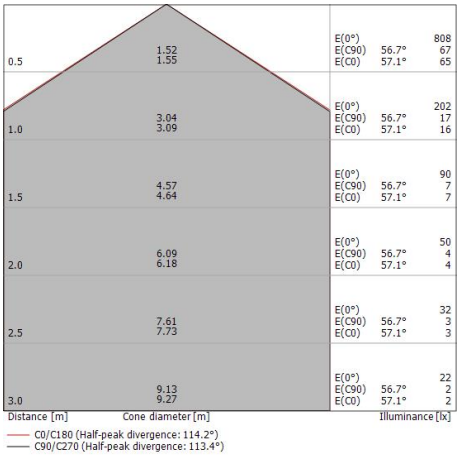


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Stadium | Wall Lights | Accessories
**76078M00**






Klammer - Schrägbügel zur Wandmontage
installationsposition: wand L=204.6mm, H=24.3mm, D=81mm.
Material:Eisen, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

| Code |
| --- |
| 83247 |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.