
Wandleuchten - Step-Leuchten
12 topLED 4 W DC 24 V | CRI 80
**76093N07**






| Technische Daten | |
|---|---|
| Typ | Oberfläche - Step-Leuchten |
| Installationsposition | Wand |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Asymmetric Wallwasher |
| Light emission direction | downward |
| Lampe Nennleistung | 4 W DC |
| Lichtstrom (Lichtquelle) | 446 lm |
| Ähnlichste Farbtemperatur / Tone | 4000 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | CV |
| Isolierklasse | 3 |
| IP | IP66 |
| IK | IK10 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | Ja |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Ja |
| Einbautiefe | 22 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.15 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Technische Merkmale des Produkts | Acquastop |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Dark brown |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Silikonharz |
| Farbe | Transparent |

**Elektronik**



89488
On/Off Driver 190~250V AC / 180~275V DC 14.4 W (1 - 3 art.)



89179
On/Off Driver 198~264V AC 24 W (1 - 6 art.)



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 37 art.)



99332
1-10V Controller (1 - 37 art.)



83333
Push and Simply Dim - DALI-2 Controller (1 - 37 art.)

| Cables Electrification | |
|---|---|
| Cable connector | No connector - Neoprene 2x0.5mm² |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten - Step-Leuchten | 12 topLED 4 W DC 24 V | CRI 80
**76093N07**

Single emission wall lights for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 12 powerled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 446 lm, with a 111.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of silicone resin. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP66; the total weight is of 0.15 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights-mounted with an outer casing, code 98111(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 36 % |
| Lichtstrom (Lichtquelle) | 446 lm |
| Leuchten Lichtstrom | 163 lm |
| Consumption | 4 W |
| Leuchten Lichtausbeute | 40 lm/W |
| Farbtemperatur | 4000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -25 / +45°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 366369h |
| L80 B10 C0 230187h |
| L90 B10 C0 110067h |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 114° |
| Light distribution simmetry | Asymmetrical |

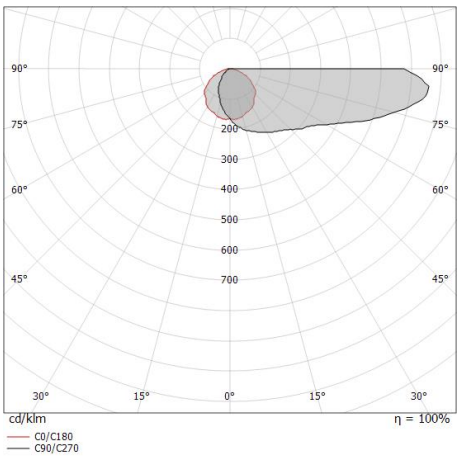





Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Envelope_R | Step Lights | Accessories
**76093N07**






Einbaugehäuse

installationsposition: wand; typ installation: mauerwerk L=107mm, H=74mm, D=50mm.

Material:Kunststoff, farbe:Black.

| Code |
| --- |
| 98111 |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.