
Wandleuchten - Step-Leuchten
44 topLED 7 W DC 24 V | CRI 80
**77370N07**





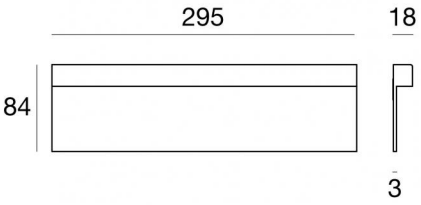


| Technische Daten | |
|---|---|
| Typ | Oberfläche - Step-Leuchten |
| Installationsposition | Wand |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Asymmetric Wallwasher |
| Light emission direction | downward |
| Lampe Nennleistung | 7 W DC |
| Lichtstrom (Lichtquelle) | 1022 lm |
| Ähnlichste Farbtemperatur / Tone | 4000 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | CV |
| Isolierklasse | 3 |
| IP | IP65 |
| IK | IK09 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | Ja |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Ja |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.466 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Technische Merkmale des Produkts | Acquastop |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Transparent |

**Elektronik**



89179
On/Off Driver 198~264V AC 24 W (1 - 3 art.)



89359
On/Off Driver 198~264V AC / V DC (1 - 6 art.)



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 21 art.)



99332
1-10V Controller (1 - 21 art.)



99722
DALI Controller 90~305V AC / V DC (1 - 17 art.)

| Cables Electrification | |
|---|---|
| Cable connector | No connector - Neoprene 2x0.75mm² |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten - Step-Leuchten | 44 topLED 7 W DC 24 V | CRI 80
**77370N07**

Single emission wall lights for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 44 topled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1022 lm, with a 146.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of uv resistant polycarbonate. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 0.466 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 7 W The power supply cable is included and features a 1 m length.


The device features protection class III and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse C. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 77 % |
| Lichtstrom (Lichtquelle) | 1022 lm |
| Leuchten Lichtstrom | 791 lm |
| Consumption | 7 W |
| Leuchten Lichtausbeute | 113 lm/W |
| Farbtemperatur | 4000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 494435h (at Tj 65  Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65  Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65  Ta 25 ) |

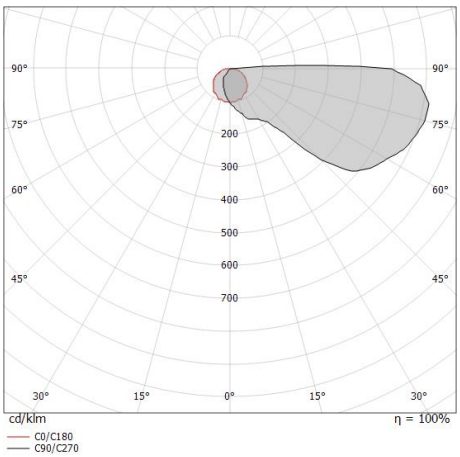




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.