
Rubber 2D

LED Strip | topLED 100 W DC 48 V | 10 W/m
1236 Lm/m | CRI 85
82143





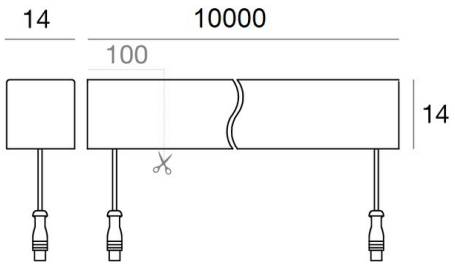

Technische Daten	
Länge	10000 mm
Minimaler Schnitt	100 mm
Typ	LED Strip
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	100 W DC
Lampenleistung / m	10 W / m
Lichtstrom (Lichtquelle)	12360 lm
Lichtstrom (Lichtquelle) / m	1236 lm / m
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	85 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK08
Glühdrahtprüfung	960°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0,25 m 1(F)x0,25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	3.850 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Opal

Elektronik



99784
Switching Driver 180~295V AC / V DC (1 art.)



99785
On/Off Driver 100~305V AC / V DC (1 - 2 art.)



83179
DALI Controller 180~295V AC / 255~417V DC 60 W (- art.)



C-E300013
DALI-2 - DMX-RDM Multi Channel 4ch. 10~52V DC 768 W (- art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | topLED 100 W DC 48 V | 10 W/m | 1236 Lm/m | CRI 85
82143

Single emission led strip for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1400 topled LEDs with CCT of 4000 K and a CRI 85; the source luminous flux is 12360 lm, with a 123.6 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 3.850 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 100 W The power supply cable is included and features a 1(M)x0,25 m 1(F)x0,25 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält 20 Lichtquellen der Energieeffizienzklasse E.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	38 %
Lichtstrom (Lichtquelle)	12360 lm
Leuchten Lichtstrom	4790 lm
Consumption	100 W
Leuchten Lichtausbeute	47 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	85 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

UGR	
UGR axial	25.3
UGR transversal	26.7
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	114°
Optik C0/C180	132°
Light distribution simmetry	Symmetrical 2 assis

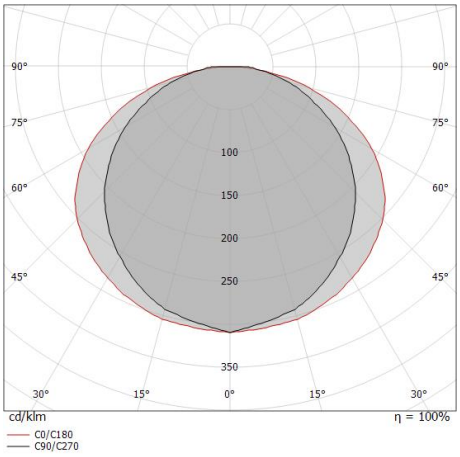


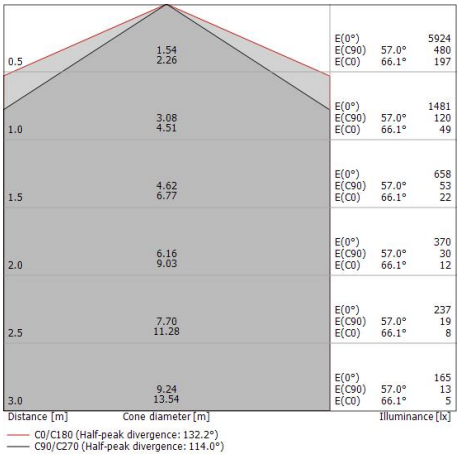

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 2D | LED Strip | Accessories
82143






Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400002






Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400001






Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A × 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002





Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001





Verlängerungskabel - Verlängerungskabel 2m


Code
99689






Verlängerungskabel - Verlängerungskabel 2m


Code
99688






Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82199







Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82198

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 2D | LED Strip | Accessories
82143






Lochschablone - Rubber Vorbereitungsset - Polystyrolstreifen

Code
99521





Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
83034






Endkappe
Material:, farbe:Transparent.


Code
99539





Klammer - Clip mit Zahnfeder mit Kabelkanal
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.


Code
99537






Klammer - Clip mit Zahnfeder
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99536


Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99549

Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003

Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400004

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 2D | LED Strip | Accessories
82143

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.