

Crew_2

Wandleuchten - Deckenleuchten - Pendelleuchte
220-240 V | topLED 11 W DC - 12 W AC | CRI 80
8289







Technische Daten	
Typ	Wandleuchten - Oberfläche - Oberfläche - Pendelleuchte - Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	11 W DC
Gesamtleistung	12 W
Lichtstrom (Lichtquelle)	1253 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.8 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Eisen - Eisen
Farbe	Grün - Sand
Bearbeitungstyp	Lackierung - Lackierung

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Opal

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten - Deckenleuchten - Pendelleuchte | 220-240 V | topLED 11 W DC - 12 W AC | CRI 80

8289

Single emission wall lights, wall lights, ceiling downlights, pendant luminaires or pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 18 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1253 lm, with a 113.9 lm/W nominal luminous efficacy.

The device body is made of iron and features a green finish, processed by means of coating The device body is made of iron and features a sand finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP40; the total weight is of 0.8 kg.

The total absorbed power is 12 W

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	65 %
Lichtstrom (Lichtquelle)	1253 lm
Leuchten Lichtstrom	824 lm
Consumption	12 W
Leuchten Lichtausbeute	68 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

UGR	
UGR axial	19.6
UGR transversal	19.8
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20


OPTICAL	
Optik C0/C180	115°
Light distribution simmetry	Symmetrical

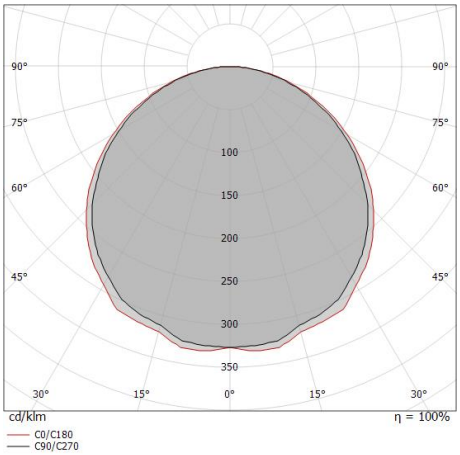

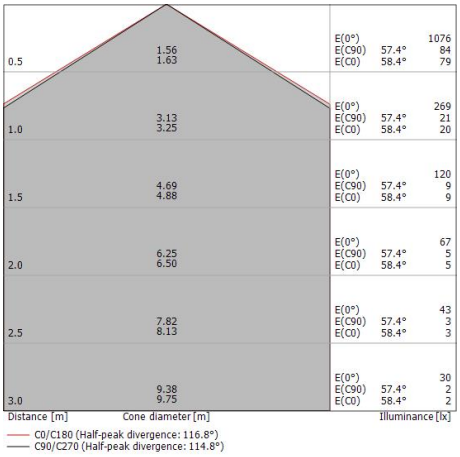


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Crew_2 | Pendant Luminaires | Accessories
8289



Deckenrosette - Abhängemontageset bestehend aus Deckenrosette und Kabeln (max. 2 Meter)
Einschließlich Driver: Nein.
Material:Eisen, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
KIT0120



Deckenrosette - Abhängemontageset bestehend aus Deckenrosette und Kabeln (max. 2 Meter)
Einschließlich Driver: Nein.
Material:Eisen, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
KIT0121

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.