
Poe_P3

Pendelleuchte | 220-240 V
topLED 17 W DC - 19 W AC | CRI 90
8356





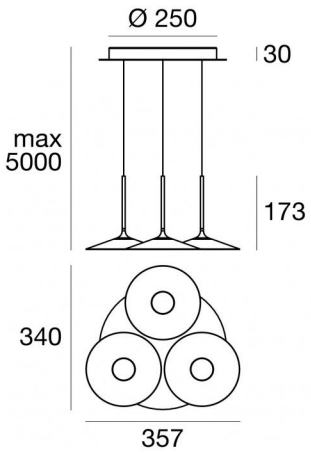

Technische Daten	
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	17 W DC
Gesamtleistung	19 W
Lichtstrom (Lichtquelle)	2113 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.7 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	3 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Eisen
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Opal

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Cables Electrification+suspension	
Max. Kabellänge	2700 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | topLED 17 W DC - 19 W AC | CRI 90
8356

Single emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 3 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2113 lm, with a 124.3 lm/W nominal luminous efficacy.


The device body is made of iron and features a text black ral9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a text black ral9005 finish, processed by means of coating.


The ingress protection degree is IP40; the total weight is of 3 kg.

The total absorbed power is 19 W The power supply cable is included and features a 2.7 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

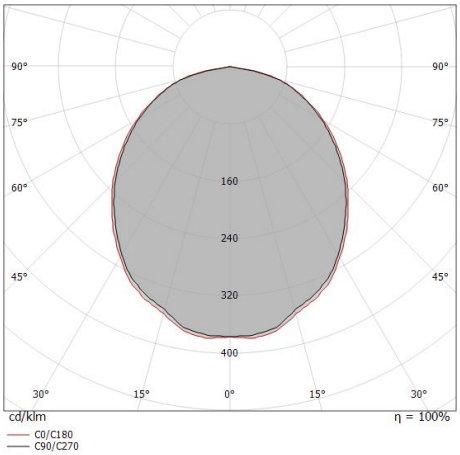

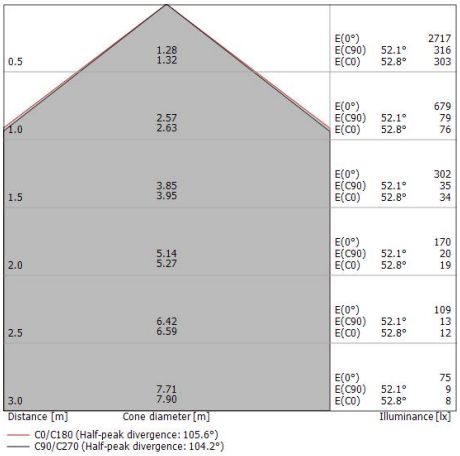

Energieeffizienzklasse
Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	85 %
Lichtstrom (Lichtquelle)	2113 lm
Leuchten Lichtstrom	1800 lm
Consumption	19 W
Leuchten Lichtausbeute	94 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

UGR	
UGR axial	26.7
UGR transversal	26.8
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	104°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.