

Paseo_L RGBW DMX

Lineare Elemente | 36 topLED 12 W DC 24 V RGBW - 3000

84055V00





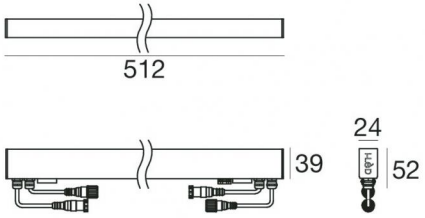

Technische Daten	
Typ	Frameless
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	frontal
Lampe Nennleistung	12 W DC
Lichtstrom (Lichtquelle)	576 lm
Ähnlichste Farbtemperatur / Tone	RGBW - 3000 K
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Control unit
Leuchte dimmbar	DMX-RDM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Ja
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.25 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.39 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free
Technische Merkmale des Produkts	TCS - UV Resistant

Oberfläche Oberfläche Gehäuse	
Material	UV beständiges Polycarbonat
Farbe	Opal

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Opal

Elektronik



89179
On/Off Driver 198~264V AC 24 W (1 - 2 art.)



89359
On/Off Driver 198~264V AC / V DC (1 - 4 art.)



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 12 art.)



C-E700026
DMX Controller (- art.)

Cables Electrification	
Cable connector	Male Plug 4 pin M12
IP (locked condition)	67
Cable connector	Female Socket 4 Pin M12
IP (locked condition)	67

Cables Signal	
Cable connector	Female Socket 5 Pin M12
IP (locked condition)	67
IP (locked condition)	67
Cable connector	Male Plug 5 Pin M12

Nennlichtstrom für eine einzelne Farbe - RGBW - 3000K

N. Led	Rot	Grün	Blau	Weiß
36	108 lm	144 lm	72 lm	252 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 36 topLED 12 W DC 24 V | RGBW - 3000
84055V00

Single emission lines for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 36 topled LEDs with CCT of RGB-W 3000 K the source luminous flux is 576 lm, with a 48.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body is made of uv resistant polycarbonate and features a opaline finish; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP67; the total weight is of 0.39 kg.

The total absorbed power is 12 W The power supply cable is included and features a 0.25 m length.


The device features protection class III and can be wall lights, ceiling or floor-mounted with an outer casing, code 98842(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	281 lm
Consumption	12 W
Leuchten Lichtausbeute	23 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

UGR	
UGR axial	24.3
UGR transversal	24
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	116°
Light distribution simmetry	Symmetrical

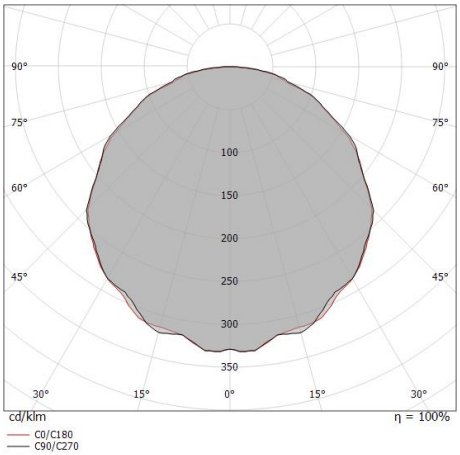

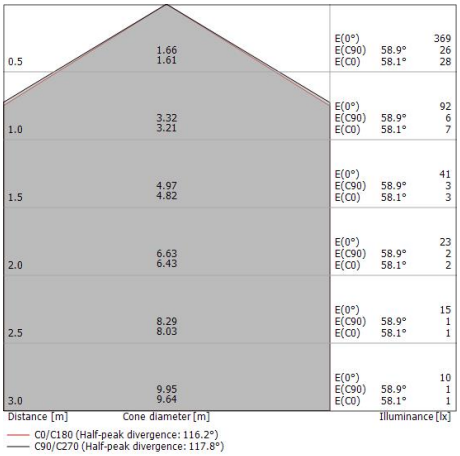

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L RGBW DMX | Lines | Accessories
84055V00



Kabel und Stecker - DMX
Länge 5000 mm; isolierung doppio; kabelklemme: nein; außendurchmesser: 4.5 mm.

Code
89189



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
89190



Kabel und Stecker - DMX - Conn. M.5 pin M12 + M.3 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
89186



Kabel und Stecker
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89187



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98149



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89188



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
99216



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98437

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L RGBW DMX | Lines | Accessories
84055V00



Kabel und Stecker - DMX - Conn. M.5 pin M12 + M.5 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; querschnitt 0.25 mm²; kabelklemme: nein.

Code
98493




Kabel und Stecker - DMX - Conn. M.5 pin M12 + F.3 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98494



Code
89564






Einbaugehäuse
installationsposition: boden; typ installation: gipskarton L=513mm, H=49mm, D=36mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98355






Einbaugehäuse
installationsposition: boden; typ installation: gipskarton L=513mm, H=89mm, D=69.5mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98367






Einbaugehäuse
installationsposition: boden; typ installation: gipskarton L=510mm, H=55.5mm, D=36mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98374






Einbaugehäuse - Falsch Decken Außengehäuse
installationsposition: boden; typ installation: gipskarton L=1455mm, H=55.5mm, D=36mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98376






Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=513mm, H=29.8mm, D=28mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98471

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L RGBW DMX | Lines | Accessories
84055V00






Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=513mm, H=66mm, D=32mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98836





Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=517mm, H=91mm, D=64.5mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.


Code
98842



Endkappe - zwei Profil Endkappen

Code
98553





Endkappe

Code
98554






Endkappe

Code
98466





Endkappe

Code
98465





Endkappe

Code
98464




Endkappe

Code
89365


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L RGBW DMX | Lines | Accessories
84055V00


Endkappe
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98840


Endkappe
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98841


Schlüssel - Paseo Ausziehschlüssel
Material:Edelstahl --, farbe:Stahl.

Code
98475

Befestigungssatz
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
98771

Befestigungsplatte - Befestigungsbasis
Material:Stahl AISI 304, farbe:Stahl.

Code
98772

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.