

Honey

Pendelleuchte | 220-240 V
360 + 270 + 180 topLED 173 W DC 700 mA - 1050 mA - 2100 mA | CRI 90
8691





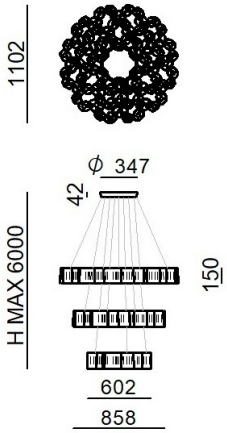

Technische Daten	
Designer	Pio e Tito Toso
Jahr der Verwirklichung	2019
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses + Diffuses + Diffuses
Light emission direction	downward and upward + downward and upward + downward and upward
Lampe Nennleistung	173 W DC
Lichtstrom (Lichtquelle)	18120 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	5.4 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text white (R9003)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PC

Cables Electrification+suspension	
Max. Kabellänge	6000 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | 360 + 270 + 180 topLED 173 W DC 700 mA - 1050 mA - 2100 mA | CRI 90 | + 580mm
8691

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 180 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3450 lm, with a 111.3 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 270 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5170 lm, with a 110.0 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 360 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 9500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white (r9003) finish, processed by means of coating; the diffuser is made of PC.

The ingress protection degree is IP20;

The total absorbed power is W The power supply cable is included and features a 5.4 m length.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 33 Lichtquellen der Energieeffizienzklasse F, F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	13 %
Lichtstrom (Lichtquelle)	18120 lm
Leuchten Lichtstrom	2433 lm
Consumption	35 W
Leuchten Lichtausbeute	69 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

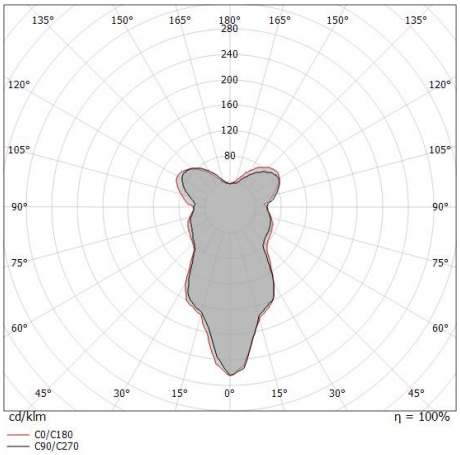

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | 360 + 270 + 180 topLED 173 W DC 700 mA - 1050 mA - 2100 mA | CRI 90 | + 860mm

8691

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 180 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3450 lm, with a 111.3 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 270 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5170 lm, with a 110.0 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 360 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 9500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white (r9003) finish, processed by means of coating; the diffuser is made of PC.

The ingress protection degree is IP20;

The total absorbed power is W The power supply cable is included and features a 5.4 m length.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 33 Lichtquellen der Energieeffizienzklasse F, F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	20 %
Lichtstrom (Lichtquelle)	18120 lm
Leuchten Lichtstrom	3687 lm
Consumption	49 W
Leuchten Lichtausbeute	75 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

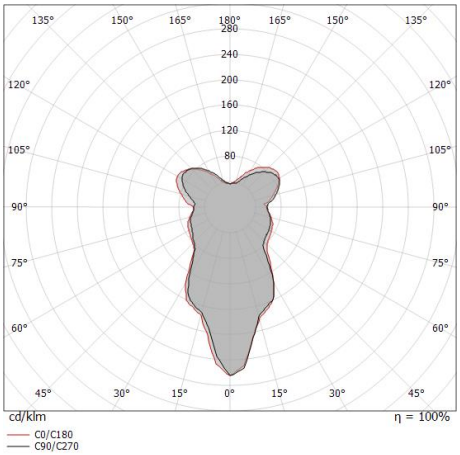

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | 360 + 270 + 180 topLED 173 W DC 700 mA - 1050 mA - 2100 mA | CRI 90 | + 1100mm

8691

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 180 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3450 lm, with a 111.3 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 270 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5170 lm, with a 110.0 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 360 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 9500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white (r9003) finish, processed by means of coating; the diffuser is made of PC.

The ingress protection degree is IP20;

The total absorbed power is W The power supply cable is included and features a 5.4 m length.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 33 Lichtquellen der Energieeffizienzklasse F, F.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	40 %
Lichtstrom (Lichtquelle)	18120 lm
Leuchten Lichtstrom	7415 lm
Consumption	105 W
Leuchten Lichtausbeute	70 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C


LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

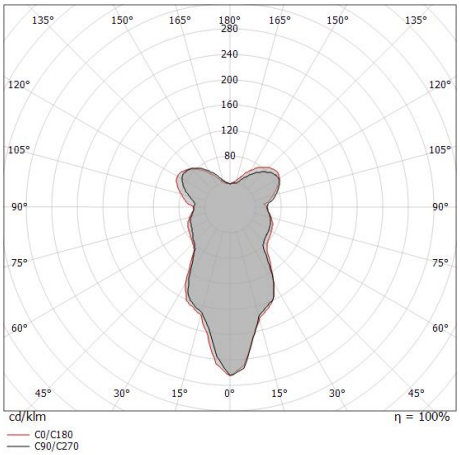

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Honey | Pendant Luminaires | Accessories
8691





Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.