
Downlights | 1 x powerLED 2.1 W DC 220 mA | RGB
**87325Z00**





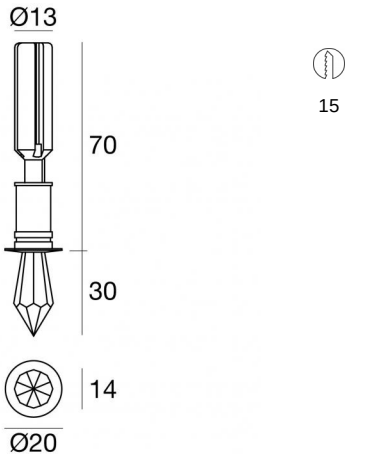


| Technische Daten | |
|---|---|
| Typ | Halbeinbau |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | powerLED |
| Optik | Diffuses |
| Lampe Nennleistung | 2.1 W DC |
| Lichtstrom (Lichtquelle) | 155 lm |
| Eingangsspannungsbereich | 220mA |
| Ähnlichste Farbtemperatur / Tone | RGB |
| Gleichstrom/Gleichspannung | CC |
| Isolierklasse | 3 |
| IP | IP20 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DALI - 1-10V |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.12 m |
| Harzbeschichtung | Nein |
| Einbautiefe | 70 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.059 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Messing gebürstet |
| Farbe | Polished (galvanic) chrome |
| Bearbeitungstyp | Tampongalvanisieren |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Kristallglas |
| Farbe | Transparent |

**Elektronik**



99333
DMX Multi Channel and Power 4ch. 24~48V DC (2 - 12 art.)

**Nennlichtstrom für eine einzelne Farbe - RGB**

| N. Led | Rot | Grün | Blau |
|---|---|---|---|
| 1 | 59 lm | 80 lm | 16 lm |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 1 x powerLED 2.1 W DC 220 mA | RGB
**87325Z00**

Single emission recessed downlights for indoor application. The RGB LED light source with a diffused light distribution is composed of 1 powerled LEDs the source luminous flux is 155 lm, with a 73.8 lm/W nominal luminous efficacy.

The device body is made of brass and features a polished (galvanic) chrome finish, processed by means of electroplating; the diffuser is made of glass.

The ingress protection degree is IP20; the total weight is of 0.059 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2.1 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84917(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

| | |
|---|---|
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Beriel | Downlights | Accessories
**87325Z00**






Einbaugehäuse
installationsposition: decke; typ installation: mauerwerk L=80mm, H=60mm, D=60mm. Material:Kunststoff ABS, farbe:Black.

**Code**
84917



Kabel und Stecker
Typ Kabel power cable; Länge 1000 mm; isolierung einzeln; querschnitt 0.5 mm²; farben: blau - grün - rot.

**Code**
84866



Kabel und Stecker
Typ Kabel power cable; Länge 3000 mm; isolierung einzeln; querschnitt 0.5 mm²; farben: blau - grün - rot.

**Code**
84867



Kabel und Stecker
Typ Kabel power cable; Länge 1500 mm; isolierung einzeln; querschnitt 0,35 mm²; farben: blau - grün - rot.


**Code**
84872



Kabel und Stecker
Typ Kabel power cable; Länge 1500 mm; isolierung einzeln; querschnitt 0,35 mm²; farben: weiß - schwarz.

**Code**
84873







Dimmer - Dimmung über Funkfernbedienung, einzelnen N/O?Taster oder Wi Fi?Netzwerk (Tuya Smart APP). Gerät mit 4 Kanälen: Der erste Dip?Schalter ist für die Stromauswahl vorgesehen, der zweite Dip?Schalter für die Konfiguration: MONO, DYNAMIC, RGB, RGBW. Schutz gegen Übertemperatur, Überlastung, Leitungsunterbrechung und Kurzschluss an der Ausgangsleitung.
RF Remote controller

**Code**
C-E700003






Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

**Code**
C-W600001



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.