
Gypsum Eye

Downlights | 1 arrayLED 7 W DC 700 mA | CRI 90
8867M





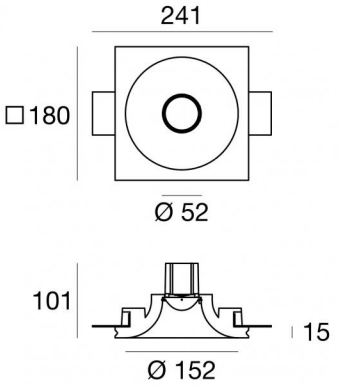

Technische Daten	
Typ	Downlights
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	7 W DC
Lichtstrom (Lichtquelle)	715 lm
Eingangsspannungsbereich	700mA
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.101 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	gesso
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Transparent
Bearbeitungstyp	Sandstrahlen

Elektronik



99115
1-10V - N/O button Multi Power 198~264V AC / V DC (1 - 3 art.)



99243
On/Off Driver 198~264V AC / V DC (1 art.)



99147
On/Off Driver 198~264V AC (2 - 3 art.)



C-E100001
Push and Simply Dim - DALI-2 Multi Power 198~264V AC / V DC (1 - 3 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Gypsum Eye

Downlights | 1 arrayLED 7 W DC 700 mA | CRI 90
8867M

Single emission recessed downlights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 1 arrayled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 715 lm, with a 102.1 lm/W nominal luminous efficacy.


The device body is made of plaster and features a white finish; the diffuser is made of PC with a sandblasting treatment.


The ingress protection degree is IP20; the total weight is of 1.101 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 7 W

The device features protection class III and can be wall lights or ceiling-mounted, with a 190 x 190 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

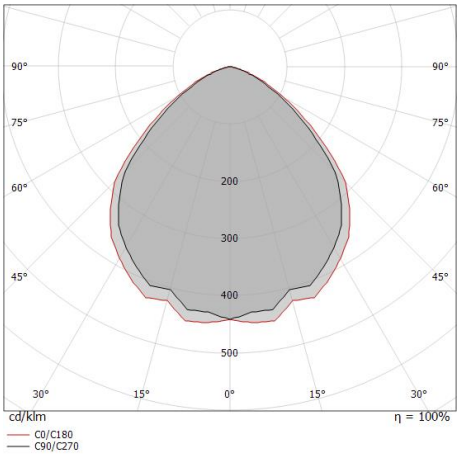

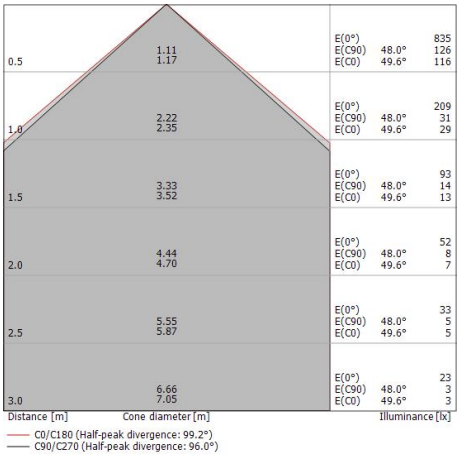

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	66 %
Lichtstrom (Lichtquelle)	715 lm
Leuchten Lichtstrom	474 lm
Consumption	7 W
Leuchten Lichtausbeute	67 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 314051h (at Tj 65 Ta 25)
L80 B10 C0 196584h (at Tj 65 Ta 25)
L90 B10 C0 92791h (at Tj 65 Ta 25)


UGR	
UGR axial	26.6
UGR transversal	27.1
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	96°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Gypsum Eye | Downlights | Accessories
8867M





Dicken - KIT Dicken für die Montage auf Gipskarton

Code

60830

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.