
Antille_P

Pendelleuchte | 220-240 V | stripLED 44 W DC - 45 W AC | CRI 90
8936





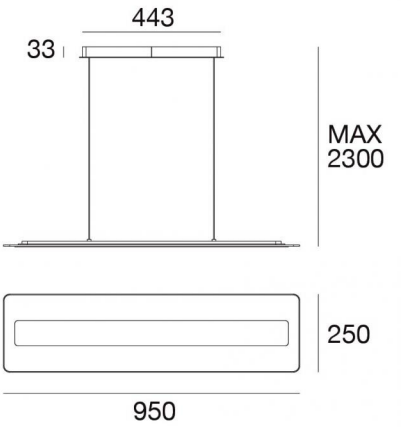

Technische Daten	
Jahr der Verwirklichung	2019
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	stripLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	44 W DC
Gesamtleistung	45 W
Lichtstrom (Lichtquelle)	5174 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.3 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	5.5 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Eisen
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Oberfläche Oberfläche diffusor	
Material	Glas
Farbe	Transparent
Bearbeitungstyp	Sandstrahlen

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Cables Electrification+suspension	
Max. Kabellänge	2300 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | stripLED 44 W DC - 45 W AC | CRI 90
8936

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 272 stripled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5174 lm, with a 117.6 lm/W nominal luminous efficacy.

The device body is made of iron and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 5.5 kg.

The total absorbed power is 45 W The power supply cable is included and features a 2.3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	82 %
Lichtstrom (Lichtquelle)	5174 lm
Leuchten Lichtstrom	4278 lm
Consumption	45 W
Leuchten Lichtausbeute	95 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B20 C0 72500h

UGR	
UGR axial	21.3
UGR transversal	26.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	172°
Optik C90/C270	154°
Light distribution simmetry	Symmetrical 2 assis

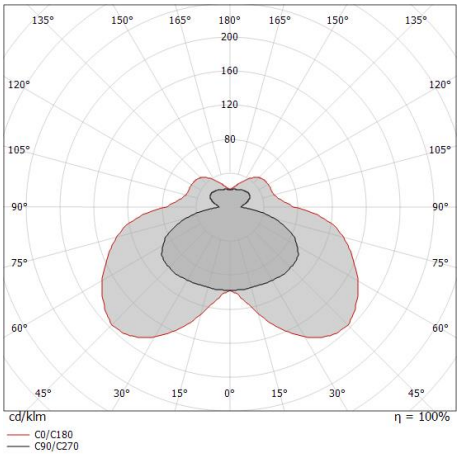

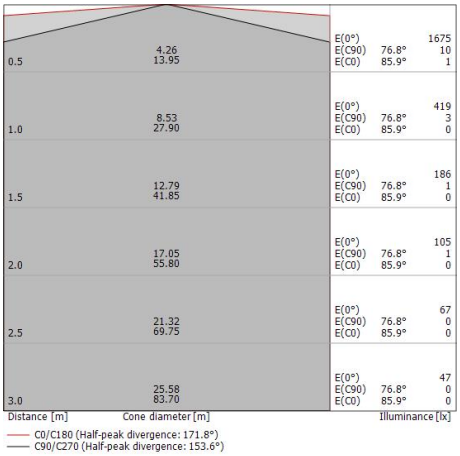

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.