
# Buonanotte

Tischleuchten | 220-240 V | 1x4W E14
**8963**



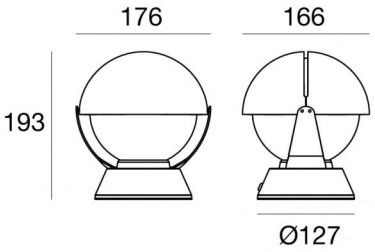


| Technische Daten | |
|---|---|
| Designer | Giovanni Luigi Gorgoni |
| Jahr der Verwirklichung | 1965 |
| Typ | Tischleuchten |
| Installationsposition | Boden |
| Installationsumgebung | Indoor |
| Leuchtmittel inbegriffen | Ja |
| Anschluss der Leuchte | 1 x E14 |
| Light emission direction | downward and upward |
| Frequency | 50-60 Hz |
| Optik | Diffuses |
| Isolierklasse | 2 |
| IP | IP20 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Steckdose | Type C |
| Kabellänge | 2 m |
| Harzbeschichtung | Nein |
| Nettogewicht | 0.85 Kg |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Metall |
| Farbe | Polished signal yellow (R1003) |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Metall |
| Farbe | Polished signal yellow (R1003) |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche sockel | |
|---|---|
| Material | Metall |
| Farbe | Polished signal yellow (R1003) |
| Bearbeitungstyp | Lackierung |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

# Buonanotte

Tischleuchten | 220-240 V | 1x4W E14
**8963**

Double emission table lamps for indoor application. LED lamplamp included, lamp cap E14 1x4W.

The device body is made of metal and features a polished signal yellow (r1003) finish, processed by means of coating; the diffuser is made of metal with a coating treatment.

The ingress protection degree is IP20; the total weight is of 0.85 kg.

The power supply cable is included and features a 2 m length.


The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 100 % |
| Leuchten Lichtstrom | 259 lm |
| Consumption | 4 W |
| Leuchten Lichtausbeute | 64 lm/W |
| Farbtemperatur | 2700 K |
| Farbwiedergabeindex | 80 Ra |
| Lichtstrom (Lichtquelle) | 1 x 470 lm |
| Standardumgebungstemperatur | 25°C |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 180° |
| Light distribution simmetry | Asymmetrical |

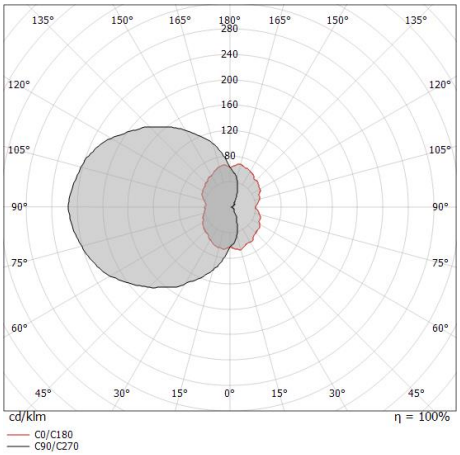




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.