Buonanotte

Tischleuchten | 220-240 V | 1x4W E14
8964

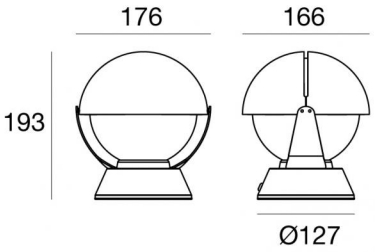

Technische Daten	
Designer	Giovanni Luigi Gorgoni
Jahr der Verwirklichung	1965
Typ	Tischleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Ja
Anschluss der Leuchte	1 x E14
Light emission direction	downward and upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	2 m
Harzbeschichtung	Nein
Nettogewicht	0.85 Kg

Oberfläche Oberfläche Gehäuse	
Material	Metall
Farbe	Polished deep blue (R5011)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	Metall
Farbe	Polished deep blue (R5011)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche sockel	
Material	Metall
Farbe	Polished deep blue (R5011)
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Buonanotte

Tischleuchten | 220-240 V | 1x4W E14
8964

Double emission table lamps for indoor application. LED lamplamp included, lamp cap E14 1x4W.

The device body is made of metal and features a polished deep blue (r5011) finish, processed by means of coating; the diffuser is made of metal with a coating treatment.

The ingress protection degree is IP20; the total weight is of 0.85 kg.

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	100 %
Leuchten Lichtstrom	259 lm
Consumption	4 W
Leuchten Lichtausbeute	64 lm/W
Farbtemperatur	2700 K
Farbwiedergabeindex	80 Ra
Lichtstrom (Lichtquelle)	1 x 470 lm
Standardumgebungstemperatur	25°C

OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Asymmetrical

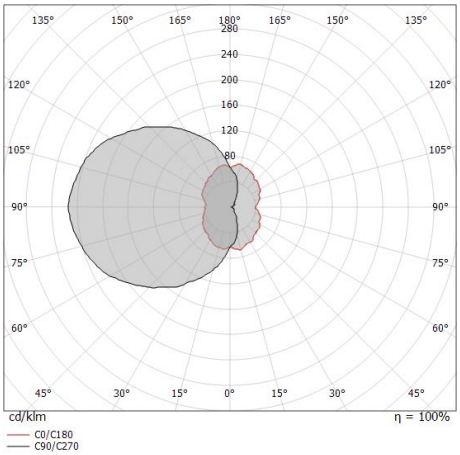

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.