

Lampiatta

Pendelleuchte | 220-240 V | 1x11W E27

8988





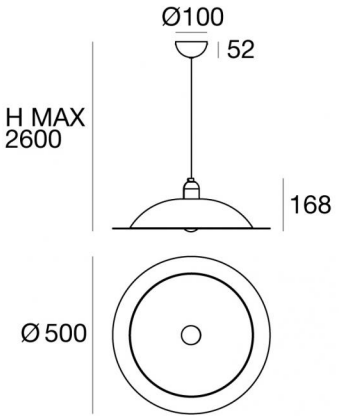

Technische Daten	
Designer	Jonathan De Pas, Donato D'urbino, Paolo Lomazzi
Jahr der Verwirklichung	1971
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Ja
Anschluss der Leuchte	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.5 m
Harzbeschichtung	Nein
Nettogewicht	1.44 Kg

Oberfläche Oberfläche Gehäuse	
Material	Aluminium - Aluminium
Farbe	Polished pure white (R9016) - Polished black (R9005)
Bearbeitungstyp	Lackierung - Lackierung

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Polished black (R9005)
Bearbeitungstyp	Lackierung

Cables Electrification+suspension	
Max. Kabellänge	2500 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lampiatta

Pendelleuchte | 220-240 V | 1x11W E27
8988

Single emission pendant luminaires for indoor application. LED lamplamp included, lamp cap E27 1x11W.

The device body is made of aluminium and features a polished pure white (r9016) finish, processed by means of coating The device body is made of aluminium and features a polished black (r9005) finish, processed by means of coating; the mounting frame is made of iron, with a polished black (r9005) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 1.44 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Farbtemperatur	2700 K
Farbwiedergabeindex	80 Ra
Lichtstrom (Lichtquelle)	1 x 1520 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.