
Butler

Stehleuchten | 220-240 V | 1 arrayLED 6 W DC - 8 W AC | CRI 90
9095

IK06 IP65





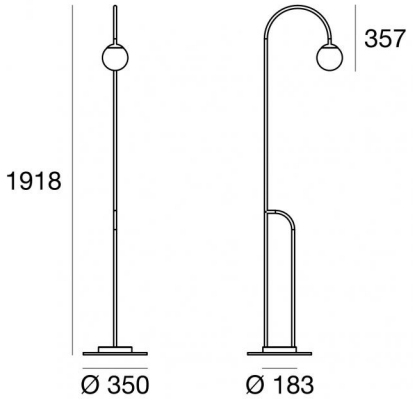

Technische Daten	
Jahr der Verwirklichung	2020
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	6 W DC
Gesamtleistung	8 W
Lichtstrom (Lichtquelle)	836 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP65
IK	IK06
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.3 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Emissione radiale
Nettogewicht	8.6 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Eisen
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Stehleuchten | 220-240 V | 1 arrayLED 6 W DC - 8 W AC | CRI 90
9095

Radial diffusion floor lamp for outdoor application. The warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 836 lm, with a 139.3 lm/W nominal luminous efficacy.


The device body is made of iron and features a text black ral9005 finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of iron, with a text black ral9005 finish, processed by means of coating.

The ingress protection degree is IP65; the total weight is of 8.6 kg.

The total absorbed power is 8 W The power supply cable is included and features a 2.3 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

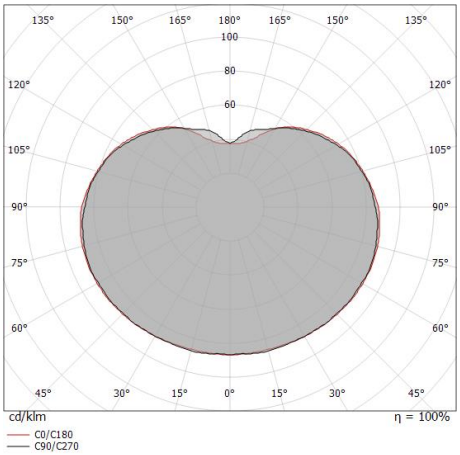

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	80 %
Lichtstrom (Lichtquelle)	836 lm
Leuchten Lichtstrom	677 lm
Consumption	8 W
Leuchten Lichtausbeute	84 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 296960h
L80 B10 C0 200000h
L90 B10 C0 150000h

UGR	
UGR axial	21
UGR transversal	21.1
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Butler | Floor Lamp | Accessories
9095



Klammer - Tischaccessoire mit Taschenhaken für Butler
installationsposition: mast.
Material:Eisen, farbe:Schwarz, bearbeitungstyp :Lackierung.

Code
KIT9095

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.