
Wandleuchten | 220-240 V | topLED 5 W DC - 6 W AC
CRI 90
9239





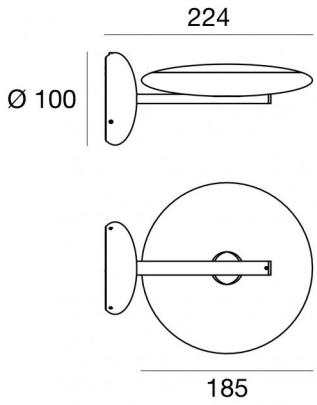

Technische Daten	
Jahr der Verwirklichung	2020
Typ	Wandleuchten
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	5 W DC
Gesamtleistung	6 W
Lichtstrom (Lichtquelle)	523 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.270 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Ähnlichste Farbtemperatur / Tone	3000 K

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Polished (galvanic) gold
Bearbeitungstyp	Tampongalvanisieren

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Transparent

Oberfläche Oberfläche fassung	
Material	Aluminium
Farbe	Polished (galvanic) gold
Bearbeitungstyp	Tampongalvanisieren

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Vivaldi_W

Wandleuchten | 220-240 V | topLED 5 W DC - 6 W AC | CRI 90 | Farbtemperatur: 3000 K
9239

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 523 lm, with a 104.6 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a polished (galvanic) gold finish, processed by means of electroplating; the diffuser is made of pmma; the mounting frame is made of aluminium, with a polished (galvanic) gold finish, processed by means of electroplating.


The ingress protection degree is IP40; the total weight is of 1.270 kg.

The total absorbed power is 6 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

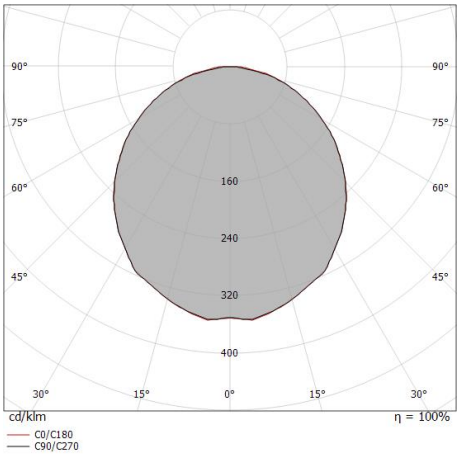

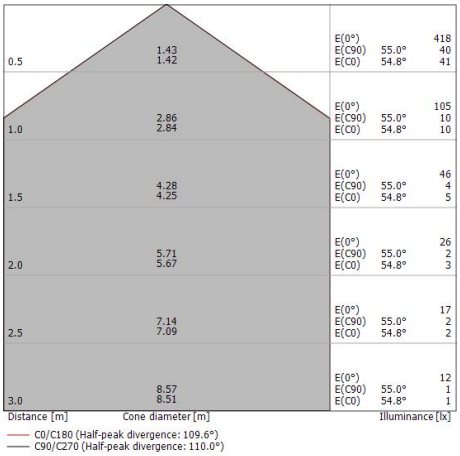

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	57 %
Lichtstrom (Lichtquelle)	523 lm
Leuchten Lichtstrom	299 lm
Consumption	6 W
Leuchten Lichtausbeute	49 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B20 C0 72500h
L80 B10 C0 50001h
L90 B10 C0 50001h

UGR	
UGR axial	22
UGR transversal	22.3
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	110°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.