
Lineare Elemente | 85-277 V
210 topLED 13.1 W DC - 15 W AC | CRI 80
93995N20

MARINE GRADE



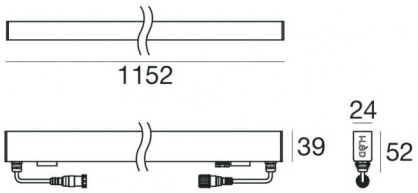

Technische Daten	
Typ	Frameless
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	20°
Light emission direction	frontal
Lampe Nennleistung	13.1 W DC
Gesamtleistung	15 W
Lichtstrom (Lichtquelle)	1365 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	85 - 277 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP67
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Ja
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.25 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.95 Kg
Schutz vor elektrostatischen Entladungen	4 KV
Schutz vor Stoßspannungen	6 KV
Optiktechnologie	Anti - Glare
Technische Merkmale des Produkts	TCS - UV Resistant

Oberfläche Oberfläche Gehäuse	
Material	UV beständiges Polycarbonat
Farbe	Transparent

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Transparent

Cables Electrification	
Cable connector	Female Socket 4 Pin M12
IP (locked condition)	67

Cable connector	Male Plug 4 pin M12
IP (locked condition)	67

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 85-277 V | 210 topLED 13.1 W DC - 15 W AC | CRI 80
93995N20

Single emission lines for outdoor application. The natural white LED light source is composed of 210 topled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1365 lm, with a 104.2 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body is made of uv resistant polycarbonate and features a transparent finish; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP67; the total weight is of 0.95 kg.

The total absorbed power is 15 W The power supply cable is included and features a 0.25 m length.


The device features protection class II and can be wall lights, ceiling or floor-mounted with an outer casing, code 98844(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	40 %
Lichtstrom (Lichtquelle)	1365 lm
Leuchten Lichtstrom	549 lm
Consumption	15 W
Leuchten Lichtausbeute	36 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B20 C0 73000h

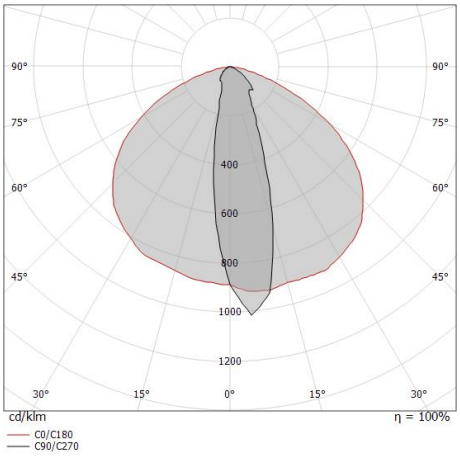

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L on/off Anti-glare | Lines | Accessories
93995N20



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
99216



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
89190



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98437



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.


Code
98149



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89188





Einbaugehäuse
installationsposition: boden; typ installation: gipskarton L=1153mm, H=49mm, D=36mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98356



Endkappe
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98876



Endkappe - zwei Profil Endkappen


Code
98553

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L on/off Anti-glare | Lines | Accessories

93995N20





Einbaugehäuse

installationsposition: boden; typ installation: mauerwerk L=1153mm, H=49mm, D=28mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code

98469






Endkappe

Code

98466






Endkappe

Code

98554






Einbaugehäuse

installationsposition: boden; typ installation: mauerwerk L=1153mm, H=29.8mm, D=28mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code

98473






Einbaugehäuse - Falsch Decken Außengehäuse

installationsposition: boden; typ installation: gipskarton L=1155mm, H=55.5mm, D=36mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code

98375






Endkappe

Code

98465





Einbaugehäuse

installationsposition: boden; typ installation: gipskarton L=1153mm, H=89mm, D=69.5mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code

98368






Endkappe

Code

98464


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Paseo_L on/off Anti-glare | Lines | Accessories
93995N20


Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=1153mm, H=66mm, D=32mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98837


Endkappe
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98840


Endkappe
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98841

Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=1157mm, H=91mm, D=64.5mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98844


Schlüssel - Paseo Ausziehschlüssel
Material:Edelstahl --, farbe:Stahl.

Code
98475




Befestigungssatz
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
98771

Befestigungsplatte - Befestigungsbasis
Material:Stahl AISI 304, farbe:Stahl.

Code
98773

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.