
# Periskop45 RGB

Scheinwerfer | 3 x powerLEDs 4.5 W DC 500 mA | RGB
**95126Z60**





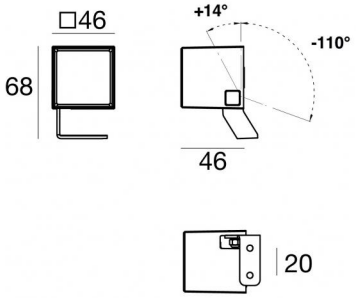


| Technische Daten | |
|---|---|
| Typ | Oberfläche |
| Installationsposition | Wand - Decke - Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | powerLEDs |
| Optik | Wide Flood |
| Light emission direction | frontal |
| Lampe Nennleistung | 4.5 W DC |
| Lichtstrom (Lichtquelle) | 251 lm |
| Eingangsspannungsbereich | 500mA |
| Ähnlichste Farbtemperatur / Tone | RGB |
| Gleichstrom/Gleichspannung | CC |
| Isolierklasse | 3 |
| IP | IP66 |
| IK | IK05 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | Ja |
| Schwenkbarkeit | Orientabile |
| Gesamtwinkel (vertikale Ebene) | 124 ° |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Ja |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.2 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Technische Merkmale des Produkts | Acquastop - TCS |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Text black RAL9005 |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Extra-helles Glas - Gehärtet |
| Farbe | transparent |
| Bearbeitungstyp | Siebdruck |

| Oberfläche Oberfläche bügel | |
|---|---|
| Material | Aluminium 5754 |
| Farbe | Anodised black aluminium |
| Bearbeitungstyp | Anodisierung 15 µm |

**Elektronik**



C-E500024
DMX-RDM - NFC Multi Channel and Power 4ch.
22~50V DC (- art.)

| Cables Electrification | |
|---|---|
| Cable connector | No |

**Nennlichtstrom für eine einzelne Farbe - RGB**

| N. Led | Rot | Grün | Blau |
|---|---|---|---|
| 3 | 80 lm | 124 lm | 47 lm |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Scheinwerfer | 3 x powerLEDs 4.5 W DC 500 mA | RGB
**95126Z60**

Single emission projectors for outdoor application. The RGB LED light source with a wide flood light distribution is composed of 3 powerled LEDs the source luminous flux is 251 lm, with a 55.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text black ral9005 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP66; the total weight is of 0.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4.5 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| | |
|---|---|
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |


| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 247450h |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Periskop45 RGB | Projectors | Accessories
**95126Z60**







Dimmer - Dimmung über Funkfernbedienung, einzelnen N/O?Taster oder Wi Fi?Netzwerk (Tuya Smart APP). Gerät mit 4 Kanälen: Der erste Dip?Schalter ist für die Stromauswahl vorgesehen, der zweite Dip?Schalter für die Konfiguration: MONO, DYNAMIC, RGB, RGBW. Schutz gegen Übertemperatur, Überlastung, Leitungsunterbrechung und Kurzschluss an der Ausgangsleitung.
RF Remote controller

**Code**
C-E700003







Erdspießen - L. 1000mm
installationsposition: terreno,Material Verkleidung: stahl aisi 304

**Code**
C-F500003






Erdspießen - L. 700mm
installationsposition: terreno,Material Verkleidung: stahl aisi 304


**Code**
C-F500002



Befestigungssatz - Befestigungsgurt zur Montage am Baum – Länge 5 Meter
Material:Edelstahl AISI 316, farbe:Stahl.


**Code**
99802







Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

**Code**
C-W600001





Erdspießen
installationsposition: terreno,Material Verkleidung: stahl aisi 304

**Code**
98550






Erdspießen - L. 160mm
installationsposition: terreno,Material Verkleidung: stahl aisi 304

**Code**
98624



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.