
Megafono

Pendelleuchte | 220-240 V | 12x6,5W E14

9569



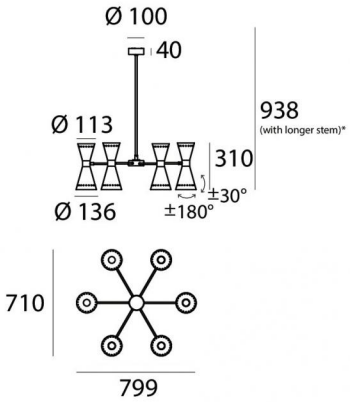

Technische Daten	
Designer	Stilnovo
Jahr der Verwirklichung	1958
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Ja
Anschluss der Leuchte	12 x E14
Light emission direction	downward and upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	180 °
Gesamtwinkel (horizontale Ebene)	60 °
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	5.700 Kg

Oberfläche Oberfläche Gehäuse	
Material	Messing gebürstet
Farbe	Polished (galvanic) gold
Bearbeitungstyp	Tampongalvanisieren

Oberfläche Oberfläche diffusor	
Material	Metall
Farbe	Polished ivory
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche fassung	
Material	Messing gebürstet
Farbe	Polished (galvanic) gold
Bearbeitungstyp	Tampongalvanisieren

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Megafono

Pendelleuchte | 220-240 V | 12x6,5W E14
9569

Double emission pendant luminaires for indoor application. LED lamplamp included, lamp cap E14 12x6,5W.

The device body is made of brass and features a polished (galvanic) gold finish, processed by means of electroplating; the diffuser is made of metal with a coating treatment; the mounting frame is made of brass, with a polished (galvanic) gold finish, processed by means of electroplating.

The ingress protection degree is IP20; the total weight is of 5.700 kg.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 12 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Farbtemperatur	2700 K
Farbwiedergabeindex	80 Ra
Lichtstrom (Lichtquelle)	12 x 806 lm
Standardumgebungstemperatur	25°C

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.