
# Sputnik

Pendelleuchte | 220-240 V | 16x6,5W E14
**9591**



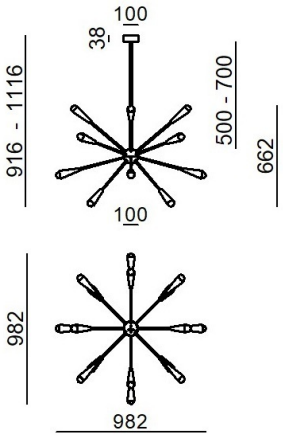


| Technische Daten | |
|---|---|
| Designer | Stilnovo |
| Jahr der Verwirklichung | 1957 |
| Typ | Pendelleuchte |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Leuchtmittel inbegriffen | Ja |
| Anschluss der Leuchte | 16 x E14 |
| Light emission direction | downward and upward |
| Frequency | 50-60 Hz |
| Optik | Diffuses |
| Isolierklasse | 1 |
| IP | IP20 |
| Glühdrahtprüfung | 650° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Nettogewicht | 5.700 Kg |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Messing gebürstet |
| Farbe | Polished (galvanic) gold |
| Bearbeitungstyp | Tampongalvanisieren |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Metall |
| Farbe | Polished ivory |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Messing gebürstet |
| Farbe | Polished (galvanic) gold |
| Bearbeitungstyp | Tampongalvanisieren |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

# Sputnik

Pendelleuchte | 220-240 V | 16x6,5W E14
**9591**

Double emission pendant luminaires for indoor application. LED lamplamp included, lamp cap E14 16x6,5W.

The device body is made of brass and features a polished (galvanic) gold finish, processed by means of electroplating; the diffuser is made of metal with a coating treatment; the mounting frame is made of brass, with a polished (galvanic) gold finish, processed by means of electroplating.

The ingress protection degree is IP20; the total weight is of 5.700 kg.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält 16 Lichtquellen der Energieeffizienzklasse E. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Farbtemperatur | 2700 K |
| Farbwiedergabeindex | 80 Ra |
| Lichtstrom (Lichtquelle) | 16 x 806 lm |
| Standardumgebungstemperatur | 25°C |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.