
Alba

Wandleuchten | 200-264 V | 2 arrayLED 18 W DC - 19 W AC | CRI 90
9665





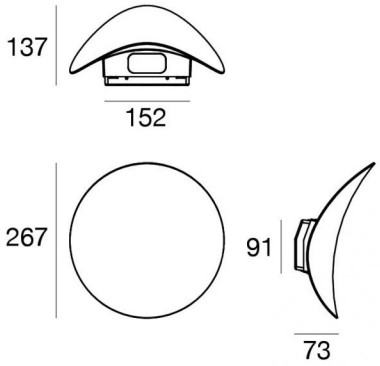

Technische Daten	
Typ	Wandleuchten
Installationsposition	Wand
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	18 W DC
Gesamtleistung	19 W
Lichtstrom (Lichtquelle)	1916 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	200 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP65
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	1.100 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	Gehärtetes Glas
Farbe	transparent

Oberfläche Oberfläche fassung	
Material	Aluminium
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten | 200-264 V | 2 arrayLED 18 W DC - 19 W AC | CRI 90
9665

Double emission wall lights for outdoor application. The warm white LED light source with a diffused light distribution is composed of 2 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1916 lm, with a 106.4 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of glass - tempered; the mounting frame is made of aluminium, with a text black ral9005 finish, processed by means of coating.

The ingress protection degree is IP65; the total weight is of 1.100 kg.

The total absorbed power is 19 W


The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	83 %
Lichtstrom (Lichtquelle)	1916 lm
Leuchten Lichtstrom	1598 lm
Consumption	19 W
Leuchten Lichtausbeute	84 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 296960h
L80 B10 C0 200000h
L90 B10 C0 150000h

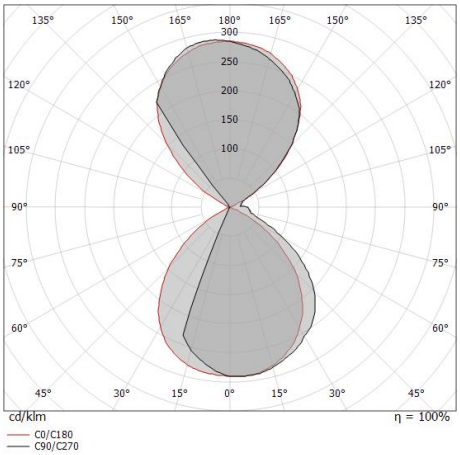

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.