
Downlights | 1 x powerLED 2 W DC 630 mA
**97044N15**



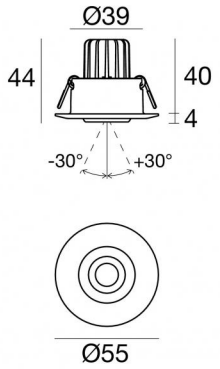


43

| Technische Daten | |
|---|---|
| Installationsposition | Wand - Decke |
| Installationsumgebung | Indoor |
| Isolierklasse | 3 |
| IP | IP20 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DALI - 1-10V |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Ja |
| Gesamtwinkel (horizontale Ebene) | 360 ° |
| Gesamtwinkel (vertikale Ebene) | 60 ° |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.12 m |
| Harzbeschichtung | Nein |
| Einbautiefe | 40 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.065 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Technische Merkmale des Produkts | TVS |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |

**Elektronik**



89147
On/Off Driver 198~264V AC / 180~275V DC (1 - 2 art.)



99105
On/Off Driver 198~264V AC (6 - 12 art.)



99376
On/Off Driver 198~264V AC (3 - 6 art.)

| Cables Electrification | |
|---|---|
| Cable connector | No |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Ghilea | Downlights | Accessories
**97044N15**






Einbaugehäuse
installationsposition: decke; typ installation: mauerwerk L=62mm, H=50mm, D=50mm.
Material:Schwarz, farbe:Black.

| Code |
| --- |
| 84902 |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.