
| RGB

97418Z30







35

Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLEDs
Optik	Flood
Light emission direction	downward
Lampe Nennleistung	6 W DC
Lichtstrom (Lichtquelle)	285 lm
Eingangsspannungsbereich	630mA
Ähnlichste Farbtemperatur / Tone	RGB
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP45
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.12 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.090 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Weiß RAL 9010
Bearbeitungstyp	Lackierung

Elektronik



99333
DMX Multi Channel and Power 4ch. 24~48V DC (- art.)

Nennlichtstrom für eine einzelne Farbe - RGB

N. Led	Rot	Grün	Blau
3	93 lm	138 lm	54 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

| RGB
97418Z30

Single emission recessed downlights for indoor application. The RGB LED light source with a flood light distribution is composed of 3 powerled LEDs the source luminous flux is 285 lm, with a 47.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white ral 9010 finish, processed by means of coating.

The ingress protection degree is IP45; the total weight is of 0.090 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be ceiling-mounted, with a 35 mm diameter hole (in plasterboard).


Compliant with the EN 60598-1 standard and its specific provisions.


Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	190 lm
Consumption	6 W
Leuchten Lichtausbeute	31 lm/W
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 247450h

UGR	
UGR axial	13.6
UGR transversal	13.1
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	24°
Light distribution simmetry	Symmetrical

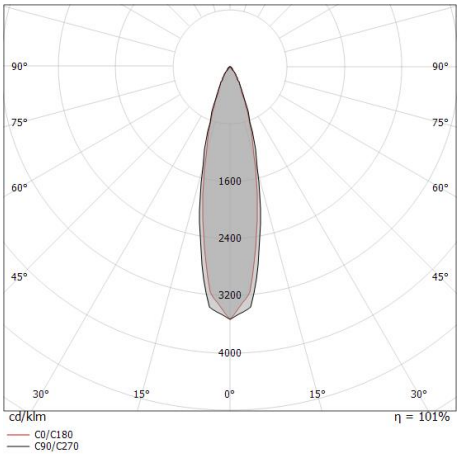


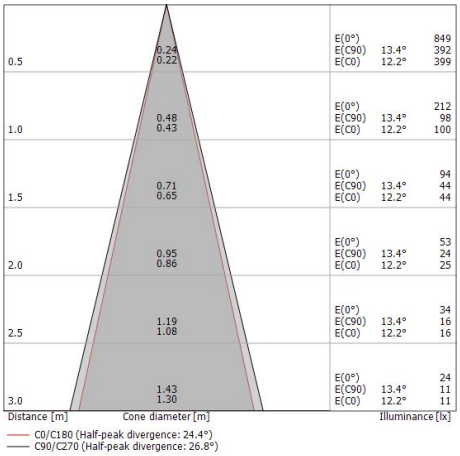

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Anton_R | Downlights | Accessories
97418Z30






Dimmer - Dimmung über Funkfernbedienung, einzelnen N/O?Taster oder Wi Fi?Netzwerk (Tuya Smart APP). Gerät mit 4 Kanälen: Der erste Dip?Schalter ist für die Stromauswahl vorgesehen, der zweite Dip?Schalter für die Konfiguration: MONO, DYNAMIC, RGB, RGBW. Schutz gegen Übertemperatur, Überlastung, Leitungsunterbrechung und Kurzschluss an der Ausgangsleitung.
RF Remote controller

Code
C-E700003





Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.