
Gemini Paint_W1

Wandleuchten | 198-264 V
72 topLED 25 W DC - 28 W AC | CRI 90
9936



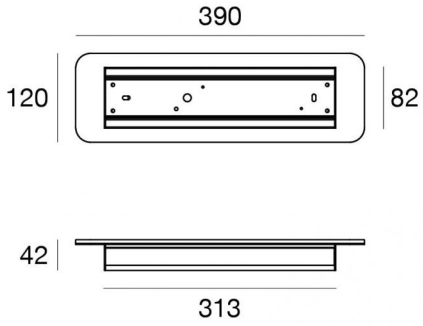

Technische Daten	
Typ	Oberfläche
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	25 W DC
Gesamtleistung	28 W
Lichtstrom (Lichtquelle)	2443 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	2.000 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse	
Material	gesso
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Transparent
Bearbeitungstyp	Satinieren

Oberfläche Oberfläche fassung	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten | 198-264 V | 72 topLED 25 W DC - 28 W AC | CRI 90
9936

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 72 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2443 lm, with a 97.7 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP40; the total weight is of 2.000 kg.

The total absorbed power is 28 W

The device features protection class I and can be wall lights-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	67 %
Lichtstrom (Lichtquelle)	2443 lm
Leuchten Lichtstrom	1656 lm
Consumption	28 W
Leuchten Lichtausbeute	59 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h (at Tj 115 Ta 25)
L90 B10 C0 55000h


OPTICAL	
Optik C0/C180	111°
Light distribution simmetry	Asymmetrical

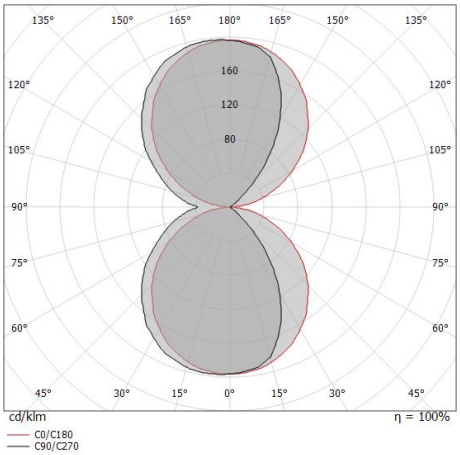

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Gemini Paint_W1 | Wall Lights | Accessories
9936





Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.