
Blum Spike

Poller & Mastaufsatzleuchten
90-264 V AC /180-280 V DC | 1 x powerLED 1.5 W DC - 1.8 W AC | CRI 80
C00001BNADI

MARINE GRADE



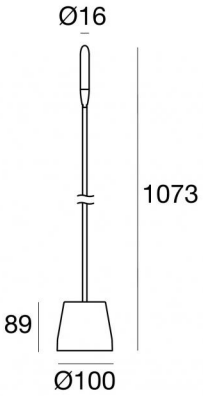

Technische Daten	
Typ	Poller
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Diffuses
Light emission direction	frontal
Lampe Nennleistung	1.5 W DC
Gesamtleistung	1.8 W
Lichtstrom (Lichtquelle)	150 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	90 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2200 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP65
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile tramite flessibile
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.767 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse	
Farbe	Braun

Oberfläche Oberfläche diffusor	
Material	Polymethylmethacrylat UV-beständige
Farbe	Opal
Bearbeitungstyp	Sandstrahlen

Oberfläche Oberfläche sockel	
Material	Kunststoff ABS
Farbe	Braun
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Poller & Mastaufsatzleuchten | 90-264 V AC /180-280 V DC | 1 x powerLED 1.5 W DC - 1.8 W AC | CRI 80

C00001BNADI

Single emission bollard & pole for outdoor application. The ancient white LED light source with a diffused light distribution is composed of 1 powerled LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 150 lm, with a 100.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body and features a brown finish; the diffuser is made of uv resistant polymethylmethacrylate with a sandblasting treatment.

The ingress protection degree is IP65; the total weight is of 0.767 kg.

The total absorbed power is 1.8 W

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	25 %
Lichtstrom (Lichtquelle)	150 lm
Leuchten Lichtstrom	38 lm
Consumption	1.8 W
Leuchten Lichtausbeute	21 lm/W
Farbtemperatur	2200 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 214455h (at Tj 65 Ta 25)
L80 B10 C0 136355h (at Tj 65 Ta 25)
L90 B10 C0 67466h (at Tj 65 Ta 25)

UGR	
UGR axial	33.1
UGR transversal	33.1
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	177°
Light distribution simmetry	Symmetrical

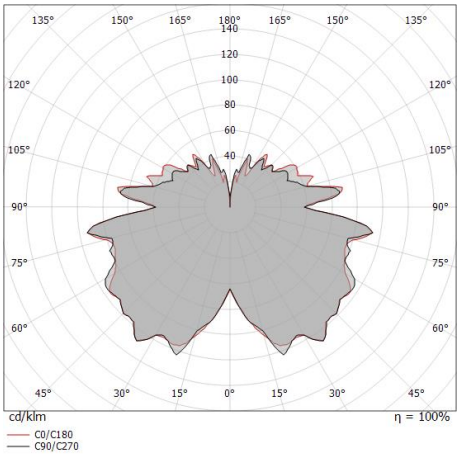


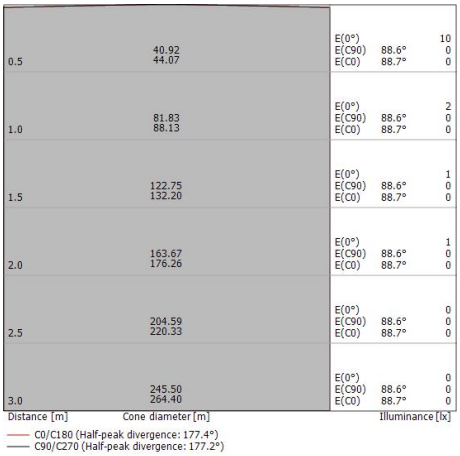

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Blum Spike | Bollard & Pole | Accessories
C00001BNADI





Erdspießen

installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code

14931

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.