
Blum Projector

Poller & Mastaufsatzleuchten | 198-264 V
3 arrayLED 12.2 W DC - 14.2 W AC | CRI 90
C00005BNNSP



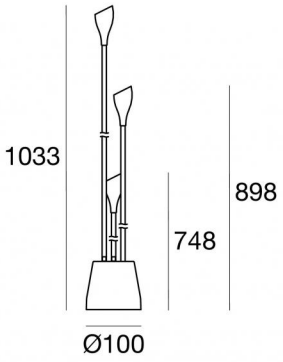

Technische Daten	
Typ	Poller
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Spot
Light emission direction	frontal
Lampe Nennleistung	12.2 W DC
Gesamtleistung	14.2 W
Lichtstrom (Lichtquelle)	1680 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP65
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile tramite flessibile
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.7 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse	
Farbe	Braun

Oberfläche Oberfläche diffusor	
Material	Polymethylmethacrylat UV-beständige
Farbe	Opal
Bearbeitungstyp	Sandstrahlen

Oberfläche Oberfläche sockel	
Material	Kunststoff ABS
Farbe	Braun
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Blum Projector

Poller & Mastaufsatzleuchten | 198-264 V | 3 arrayLED 12.2 W DC - 14.2 W AC | CRI 90
C00005BNNSP

Single emission bollard & pole for outdoor application. The natural white LED light source with a spot light distribution is composed of 3 arrayled LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 1680 lm, with a 137.7 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body and features a brown finish; the diffuser is made of uv resistant polymethylmethacrylate with a sandblasting treatment.

The ingress protection degree is IP65; the total weight is of 0.7 kg.

The total absorbed power is 14.2 W The power supply cable is included and features a 1 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse F.


Illuminotechnical Eigenschaften	
Lichtstrom (Lichtquelle)	1680 lm
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-25 / +50°C

LED Life / Failure Ratio
L70 B10 C0 314051h (at Tj 65 Ta 25)
L80 B10 C0 196584h (at Tj 65 Ta 25)
L90 B10 C0 92791h (at Tj 65 Ta 25)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Blum Projector | Bollard & Pole | Accessories
C00005BNNSP





Erdspießen

installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
14931

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.