
Rubber 3D concrete

| CRI >90

C00128CCWDI





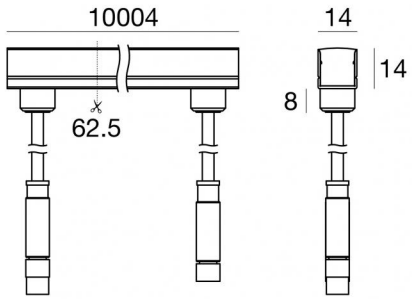

Technische Daten	
Länge	10000 mm
Minimaler Schnitt	62.5 mm
Typ	LED Strip
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	100 W DC
Lampenleistung / m	10 W / m
Lichtstrom (Lichtquelle)	2740 lm
Lichtstrom (Lichtquelle) / m	274 lm / m
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	>90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK07
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0.25 m + 1(F)x0.25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.365 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Grau

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Grau

Elektronik



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)



99332
1-10V Controller (1 art.)



99374
On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)



83333
Push and Simply Dim - DALI-2 Controller (1 art.)



C-E400002
Push and Simply Dim - DALI-2 Controller (1 - 2 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

| CRI >90
C00128CCWDI

Single emission led strip for outdoor application. The warm white LED light source with a diffused light distribution is composed of 1120 topled LEDs with CCT of 3000 K and a CRI >90; the source luminous flux is 2740 lm, with a 27.4 lm/W nominal luminous efficacy.


The device body is made of technopolymer and features a grey finish; the diffuser is made of pu.


The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 100 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

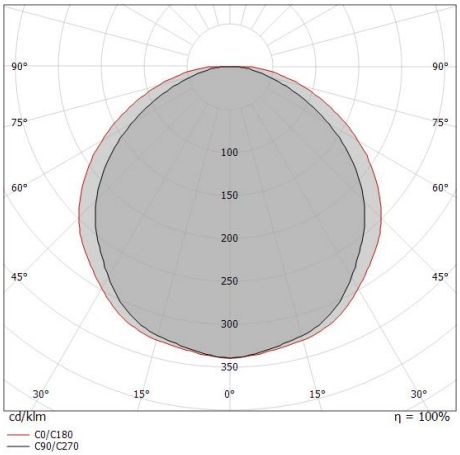

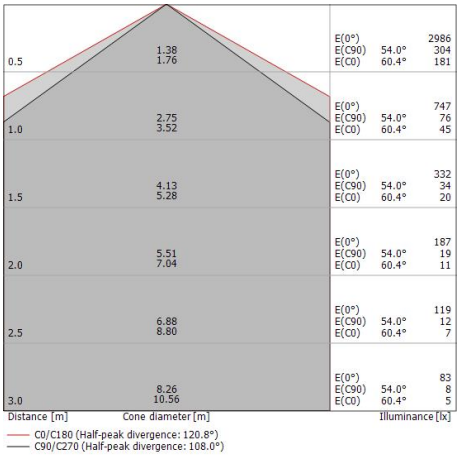

Energieeffizienzklasse
Dieses Produkt enthält 10 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	80 %
Lichtstrom (Lichtquelle)	2740 lm
Leuchten Lichtstrom	2200 lm
Consumption	97 W
Leuchten Lichtausbeute	22 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L70 B10 C0 191000h
L80 B10 C0 120000h
L90 B10 C0 58000h

UGR	
UGR axial	21.1
UGR transversal	23.5
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D concrete | LED Strip | Accessories
C00128CCWDI





Endkappe
Material:, farbe:Transparent.

Code
99539



Stecker

Code
89548



Strip Service - Doppelseitiges Klebeband 33 Meter

Code
99520





Kabelklemme


Code
98990



Erdspießen - ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG
D114X204 fur Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
83351






Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400001






Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400002






Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D concrete | LED Strip | Accessories
C00128CCWDI






Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400004





Kabel und Stecker - Kabel(M) für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic
Länge 2500 mm; isolierung doppio; querschnitt 0.5 mm²; farben: weiß - grau.

Code
C-W200001






Kabel und Stecker - Kabel(F) für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic
Länge 2500 mm; isolierung doppio; querschnitt 0.5 mm²; farben: weiß - grau.

Code
C-W200002






Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic
Länge 5000 mm; isolierung doppio; querschnitt 0.5 mm²; farben: weiß - grau.


Code
C-W200007






Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99549






Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82198






Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100007







Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100008

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Rubber 3D concrete | LED Strip | Accessories
C00128CCWDI






Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
83034






Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82199






Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.


Code
C-K100009






Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100010






Klammer - Flexibles Profil
installationsposition: wand, decke L=1045mm, H=19mm, D=16.2mm.
Material:Edelstahl --, farbe:Stahl.

Code
99541






Klammer - Clip mit Zahnfeder mit Kabelkanal
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99537






Profil - Flexibles Profil
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K100011





Lochschablone
Material:Aluminium, farbe:Polished aluminium.

Code
C-V200005

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D concrete | LED Strip | Accessories
C00128CCWDI

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.