
# Rubber 3D Custom RGBW



LED Strip | 420 topLED 56.3 W DC 24 V | 15 W/m
CRI >90 | RGBW - 3000
**C0014VDI03754**





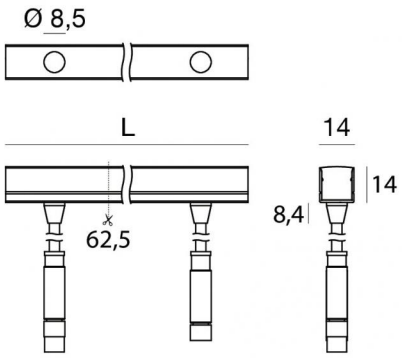


| Technische Daten | |
|---|---|
| Länge | 3754 mm |
| Typ | LED Strip |
| Installationsposition | Wand - Decke |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Lampe Nennleistung | 56.3 W DC |
| Lampenleistung / m | 56.3 W / m |
| Ähnlichste Farbtemperatur / Tone | RGBW - 3000 K |
| Farbwiedergabeindex | >90 Ra |
| Gleichstrom/Gleichspannung | CV |
| Isolierklasse | 3 |
| IP | IP67 |
| IK | IK07 |
| Glühdrahtprüfung | 650° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| ETL | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DALI - 1-10V |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 1(M)x0.25 m + 1(F)x0.25 m |
| Harzbeschichtung | Ja |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.387 kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Technopolymer |
| Farbe | Weiß |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | PU |
| Farbe | Opal |

**Elektronik**



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 2 art.)



99332
1-10V Controller (1 - 2 art.)



C-E700005
DMX-RDM Multi Channel V DC (- art.)



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

# Rubber 3D Custom RGBW



LED Strip | 420 topLED 56.3 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000
**C0014VDI03754**

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.387 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 56.3 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | >90 Ra |
| Standardumgebungstemperatur | -20 / +55°C |


| **LED Life / Failure Ratio** |
|---|
| L90 B10 C0 54000h |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Rubber 3D Custom RGBW | LED Strip | Accessories
**C0014VDI03754**







Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

**Code**
99549





Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

**Code**
82198







Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

**Code**
C-K100007







Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

**Code**
C-K100008







Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.


**Code**
C-F400001







Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.


**Code**
C-F400002





Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

**Code**
83034




Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.


**Code**
82199



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
**C0014VDI03754**







Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

**Code**
C-K100009







Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

**Code**
C-K100010







Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

**Code**
C-F400003







Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.


**Code**
C-F400004







Profil - Flexibles Profil
Material:Stahl AISI 304, farbe:Stahl.


**Code**
C-K100011





Blendschutz - Blendfreies Augenlid mit Fischgrätenmuster
Blendschutzart: palpebra.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

**Code**
C-K100032




Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

**Code**
C-K400168




Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

**Code**
C-K400169



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
**C0014VDI03754**





Erdspießen - ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG
D114X204 fur Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

**Code**
83351




Befestigungssatz - Bodenpfahl mit kippbarer Halterung

**Code**
C-F500004




Befestigungssatz - Bodenpfahl mit kippbarer Halterung

**Code**
C-F500005





Endkappe
Material:, farbe:Transparent.

**Code**
99539





Lochschablone
Material:Aluminium, farbe:Polished aluminium.

**Code**
C-V200005





Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-K100021




Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-K100022





Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Weiß.

**Code**
C-E300007



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
**C0014VDI03754**




Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Black.

**Code**
C-E300008



Strip Service - Doppelseitiges Klebeband 33 Meter

**Code**
99520



Kabelklemme
Material:Kunststoff ABS, farbe:Black.

**Code**
C-W300001




Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

**Code**
C-W200005





Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

**Code**
C-W200006





Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 5000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

**Code**
C-W200011

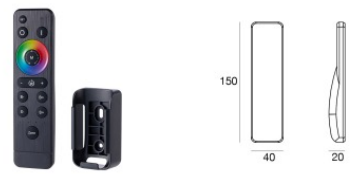


Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

**Code**
C-W600001

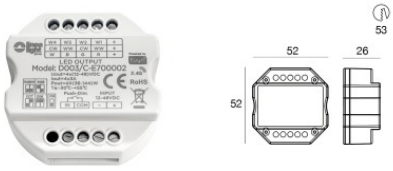


Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A × 4 Kanäle 12/24/48V
RF Remote controller

**Code**
C-E700002



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
**C0014VDI03754**


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.