
Rubber 3D Custom RGBW

LED Strip | 540 topLED 72.3 W DC 24 V | 15.01 W/m
CRI >90 | RGBW - 3000
C0014VDI04817





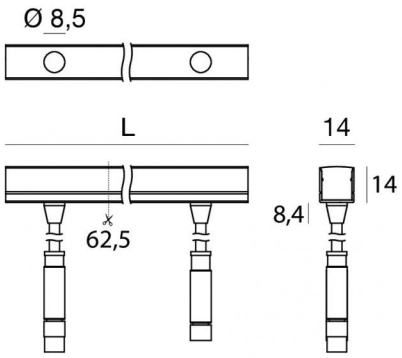

Technische Daten	
Länge	4817 mm
Typ	LED Strip
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Lampe Nennleistung	72.3 W DC
Lampenleistung / m	72.3 W / m
Ähnlichste Farbtemperatur / Tone	RGBW - 3000 K
Farbwiedergabeindex	>90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK07
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0.25 m + 1(F)x0.25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.496 kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Opal

Elektronik



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 2 art.)



99332
1-10V Controller (1 - 2 art.)



C-E700005
DMX-RDM Multi Channel V DC (- art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW

LED Strip | 540 topLED 72.3 W DC 24 V | 15.01 W/m | CRI >90 | RGBW - 3000
C0014VDI04817

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.496 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 72.3 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.


Illuminotechnical Eigenschaften	
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L90 B10 C0 54000h

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Rubber 3D Custom RGBW | LED Strip | Accessories
C0014VDI04817






Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99549






Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82198






Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100007






Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100008






Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.


Code
C-F400001






Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400002






Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
83034






Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82199

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
C0014VDI04817






Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100009






Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100010






Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003






Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.


Code
C-F400004






Profil - Flexibles Profil
Material:Stahl AISI 304, farbe:Stahl.


Code
C-K100011






Blendschutz - Blendfreies Augenlid mit Fischgrätenmuster
Blendschutzart: palpebra.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

Code
C-K100032



Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K400168



Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K400169

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
C0014VDI04817




Erdspießen - ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG
D114X204 fur Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
83351



Befestigungssatz - Bodenpfahl mit kippbarer Halterung

Code
C-F500004



Befestigungssatz - Bodenpfahl mit kippbarer Halterung

Code
C-F500005






Endkappe
Material:, farbe:Transparent.


Code
99539






Lochschablone
Material:Aluminium, farbe:Polished aluminium.

Code
C-V200005




Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
C-K100021



Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
C-K100022




Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Weiß.

Code
C-E300007

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
C0014VDI04817



Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Black.

Code
C-E300008



Strip Service - Doppelseitiges Klebeband 33 Meter

Code
99520



Kabelklemme
Material:Kunststoff ABS, farbe:Black.

Code
C-W300001



Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200005




Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200006




Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 5000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200011

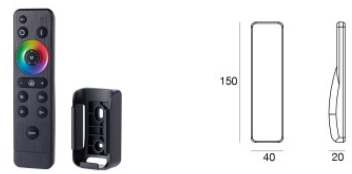

Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit,
Ein/Aus

Code
C-W600001

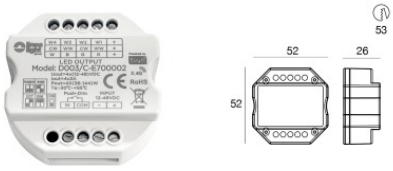

Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A
× 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D Custom RGBW | LED Strip | Accessories
C0014VDI04817

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.