
Poller & Mastaufsatzleuchten

198-264 V AC /220-240 V DC | 24 x powerLEDs 34 W DC - 38 W AC | CRI 70

**C00380DBNST**



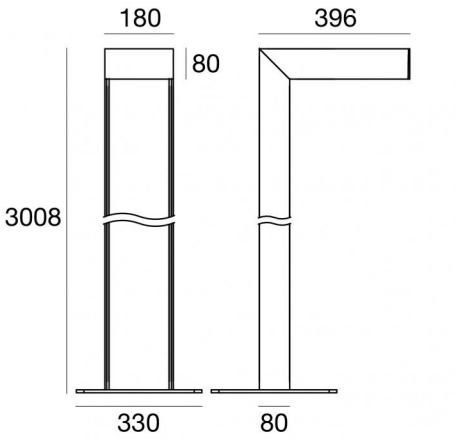


| Technische Daten | |
|---|---|
| Typ | Mast |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | powerLEDs |
| Optik | STREET |
| Light emission direction | downward |
| Lampe Nennleistung | 34 W DC |
| Gesamtleistung | 38 W |
| Lichtstrom (Lichtquelle) | 5448 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 4000 K |
| Farbwiedergabeindex | 70 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP66 |
| IK | IK08 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | DALI-2 - PUSH DIM |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 27.8 Kg |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | 2 KV |
| Technische Merkmale des Produkts | Acquastop |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Dark brown |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Extra-helles Glas - Gehärtet |
| Farbe | transparent |
| Bearbeitungstyp | Siebdruck |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Poller & Mastaufsatzleuchten | 198-264 V AC /220-240 V DC | 24 x powerLEDs 34 W DC - 38 W AC | CRI 70

**C00380DBNST**

Single emission bollard & pole for outdoor application. The natural white LED light source with a street light distribution is composed of 24 powerled LEDs with CCT of 4000 K and a CRI 70; the source luminous flux is 5448 lm, with a 160.2 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP66; the total weight is of 27.8 kg.

The total absorbed power is 38 W

The device features protection class I and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 83 % |
| Lichtstrom (Lichtquelle) | 5448 lm |
| Leuchten Lichtstrom | 4550 lm |
| Consumption | 38 W |
| Leuchten Lichtausbeute | 119 lm/W |
| Farbtemperatur | 4000 K |
| Standard Deviation of Colour Matching | 1.5 Step |
| Farbwiedergabeindex | 70 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 1240219h (at Tj 65  Ta 25 ) |
| L80 B10 C0 745627h (at Tj 65  Ta 25 ) |
| L90 B10 C0 309367h (at Tj 65  Ta 25 ) |


| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 145° |
| Light distribution simmetry | Asymmetrical |

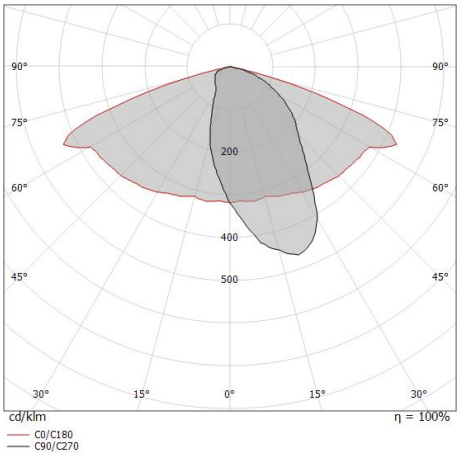





Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Peak-Maxi | Bollard & Pole | Accessories
**C00380DBNST**




Befestigungsplatte
Material:Eisen, farbe:Black.

**Code**
65078




Befestigungsplatte - Befestigungsplatte
Material:Eisen, farbe:Dark brown.

**Code**
65075



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.