
Pendelleuchte | 480 topLED 90 W DC 24 V | CRI 90

C00429BBMDD









Technische Daten	
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Double Diffused
Light emission direction	downward and upward
Lampe Nennleistung	90 W DC
Lichtstrom (Lichtquelle)	10001 lm
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	4.85 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	7.4 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Text black RAL9005
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Oberfläche Oberfläche diffusor	
Farbe	Opal

Elektronik



99374
On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)



83042
1-10V - Push and Simply Dim - DALI-2 Controller (- art.)

Cables Pendelleuchte	
Max. Kabellänge	5000 mm

Cables Electrification	
Cable connector	No
Cable connector	No

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 480 topLED 90 W DC 24 V | CRI 90
C00429BBMDD

Double emission pendant luminaires for indoor application. The super warm white LED light source with a double diffused light distribution is composed of 480 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 10001 lm, with a 111.1 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of silicone.


The ingress protection degree is IP40; the total weight is of 7.4 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 90 W The power supply cable is included and features a 4.85 m length.

The device features protection class III and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

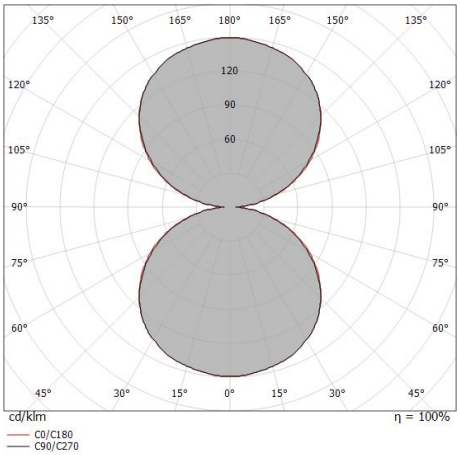

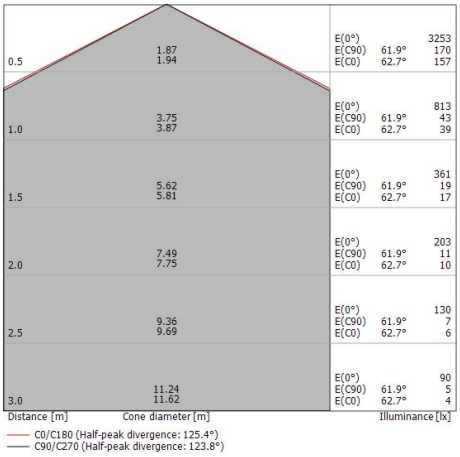

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	54 %
Lichtstrom (Lichtquelle)	10001 lm
Leuchten Lichtstrom	5443 lm
Consumption	90 W
Leuchten Lichtausbeute	60 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147586h (at Tj 65 Ta 25)


UGR	
UGR axial	15.1
UGR transversal	15.3
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	124°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Tour_D | Pendant Luminaires | Accessories
C00429BBMDD






Hängeleuchten - Aufhängungs Befestigungsset – 3 Stück
Material:Aluminiumlegierung 6026, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
64670






Deckenrosette - 3-Draht-Rosette | 220-240 V AC On-Off Max 75 W + 75 W
Einschließlich Driver: Ja; Netzteil-Verwaltungsprotokoll: On/off; Maximale Leistung: 75+75W.
Material:Eisen, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
65326





Deckenrosette - 3-Draht-Rosette | 220-240 V AC DALI Push Max 75 W + 75 W
Einschließlich Driver: Ja; Netzteil-Verwaltungsprotokoll: Dali; Maximale Leistung: 75+75W.
Material:Eisen, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
C-F300018

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.