
Rubber 2D_mini

LED Strip | topLED 60 W DC 24 V | 6 W/m | 624 Lm/m
CRI >90
C00465WHMDI



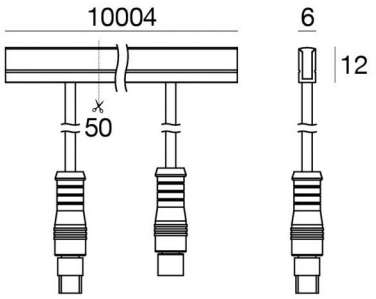

Technische Daten	
Länge	10000 mm
Minimaler Schnitt	50 mm
Typ	LED Strip
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	60 W DC
Lampenleistung / m	6 W / m
Lichtstrom (Lichtquelle)	6240 lm
Lichtstrom (Lichtquelle) / m	624 lm / m
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	>90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0.25 m + 1(F)x0.25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	2.73 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Opal

Elektronik



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 2 art.)



99332
1-10V Controller (1 - 2 art.)



99374
On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)



83333
Push and Simply Dim - DALI-2 Controller (1 - 2 art.)



C-E400002
Push and Simply Dim - DALI-2 Controller (1 - 4 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | topLED 60 W DC 24 V | 6 W/m | 624 Lm/m | CRI >90
C00465WHMDI

Single emission led strip for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 1400 topled LEDs with CCT of 2700 K and a CRI >90; the source luminous flux is 6240 lm, with a 104.0 lm/W nominal luminous efficacy.


The device body is made of technopolymer and features a white finish; the diffuser is made of pu.


The ingress protection degree is IP67; the total weight is of 2.73 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 60 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

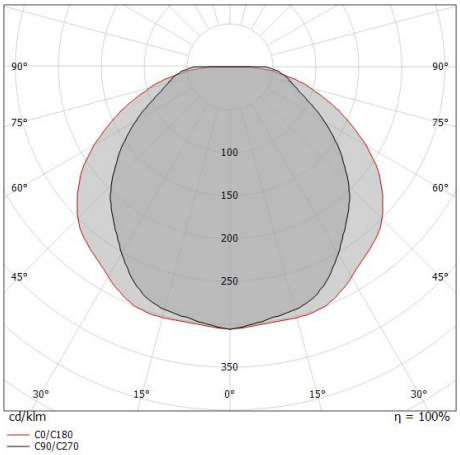

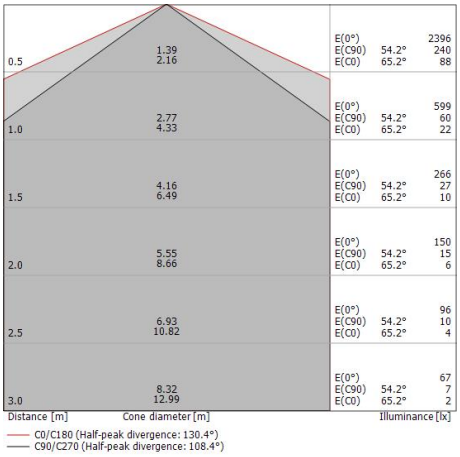

Energieeffizienzklasse
Dieses Produkt enthält 20 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	31 %
Lichtstrom (Lichtquelle)	6240 lm
Leuchten Lichtstrom	1960 lm
Consumption	60 W
Leuchten Lichtausbeute	32 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L70 B10 C0 191000h
L80 B10 C0 120000h
L90 B10 C0 58000h


UGR	
UGR axial	26.2
UGR transversal	27.5
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	130°
Light distribution simmetry	Symmetrical 2 assis

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 2D_mini | LED Strip | Accessories
C00465WHMDI





Endkappe
Material:, farbe:Transparent.

Code
99538





Verlängerungskabel - Verlängerungskabel 2m

Code
99688





Verlängerungskabel - Verlängerungskabel 2m

Code
99689


Profil - Linearprofil aus Aluminium 20x10x1000mm für Rubber 2D Mini
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82846

Profil - Linearprofil aus Aluminium 20x10x1000mm für Rubber 2D Mini
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82202

Klammer - Clip mit Zahnfeder für Rubber 2D Mini
installationsposition: wand, decke L=50mm, H=20mm, D=10mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82847

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.