
Xenia_W RGBW DMX

36 topLED 11 W DC - 14 W AC | RGBW - 4000
C00527AMQ3F





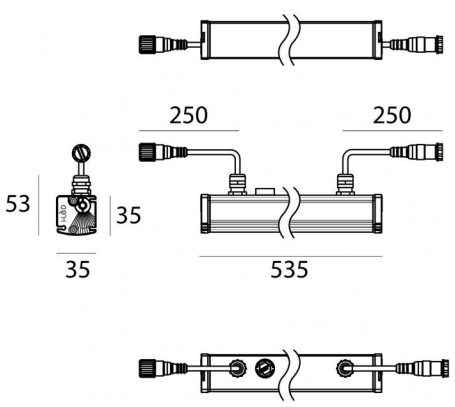

Technische Daten	
Typ	Wandleuchten - Oberfläche
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Elliptic Flood (20°÷29°) x >60°
Light emission direction	frontal
Lampe Nennleistung	11 W DC
Gesamtleistung	14 W
Lichtstrom (Lichtquelle)	576 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	85 - 277 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	RGBW - 4000 K
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP66
IK	IK07
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Control unit/Driver
Leuchte dimmbar	DMX-RDM
Schwenkbarkeit	Orientabile
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.25 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.7 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV
Technische Merkmale des Produkts	TCS

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 15 µm

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Transparent

Cables Electrification+signal	
Cable connector	Male connector 5 Pin M12
IP (locked condition)	67
Cable connector	Female connector 5 Pin M12
IP (locked condition)	67

Nennlichtstrom für eine einzelne Farbe - RGBW - 4000K				
N. Led	Rot	Grün	Blau	Weiß
36	108 lm	144 lm	72 lm	252 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

36 topLED 11 W DC - 14 W AC | RGBW - 4000
C00527AMQ3F

Single emission wall lights or lines for outdoor application. The RGBW - 4000 K LED light source with a elliptic flood (20°÷29°) x >60° light distribution is composed of 36 topled LEDs with CCT of RGB-W 4000 K the source luminous flux is 576 lm, with a 52.4 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of pmma. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP66; the total weight is of 0.7 kg.

The total absorbed power is 11 W The power supply cable is included and features a 0.25 m length.


The device features protection class II and can be wall lights, ceiling or floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	614 lm
Consumption	14 W
Leuchten Lichtausbeute	43 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

UGR	
UGR axial	23.3
UGR transversal	25.6
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	102°
Optik C90/C270	41°
Light distribution simmetry	Symmetrical 2 assis

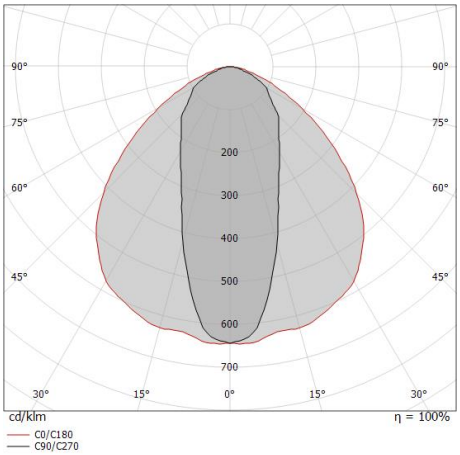

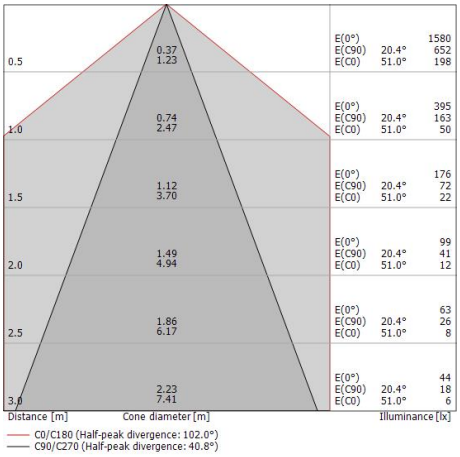

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_W RGBW DMX | Lines | Accessories
C00527AMQ3F



Blendschutz - Blendschutzblende
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
98953



Klammer
installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
98949





Klammer
installationsposition: wand, decke, boden L=95.6mm, H=45mm, D=28mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
89045



Klammer
installationsposition: wand, decke, boden L=155.6mm, H=45mm, D=28mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.


Code
89046



Klammer
installationsposition: wand, decke, boden L=305.6mm, H=60mm, D=28mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
89047





Klammer
installationsposition: wand, decke L=52mm, H=43mm, D=75mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
C-F400006



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200013



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale.

Code
C-W200014

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_W RGBW DMX | Lines | Accessories
C00527AMQ3F



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200015



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200016



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale.

Code
C-W200017



Stecker
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

Code
C-W200018



Stecker
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.


Code
C-W200019



Endkappe - Adapterkappe für DMX-Leitungsverschluss

Code
C-W400005





Klammer
installationsposition: wand L=32mm, H=23mm, D=25mm.
Material:Stahl AISI 304, farbe:Stahl.

Code
C-F400008

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.