
Xenia_AL RGBW DMX

Lineare Elemente | 85-277 V
36 topLED 5.4 W DC - 7 W AC | RGBW - 3000
C00584AMVDI





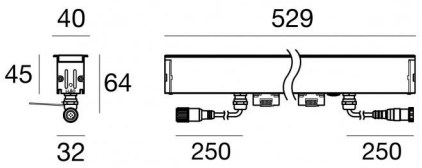

Technische Daten	
Typ	Frame
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	upward
Lampe Nennleistung	5.4 W DC
Gesamtleistung	7 W
Lichtstrom (Lichtquelle)	576 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	85 - 277 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	RGBW - 3000 K
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP68
Installationsbeschränkung	Nicht für Einsatz unter Wasser
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Control unit/Driver
Leuchte dimmbar	DMX-RDM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Ja
Überrollbarkeit	2000 Kg
Einschließlich Kabel	Ja
Kabellänge	0.25 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.67 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	0.5 KV

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 15 µm

Oberfläche Oberfläche diffusor	
Material	Gehärtetes Glas
Farbe	Weiß matt
Bearbeitungstyp	Anti-Rutsch-Lackierung

Cables Electrification+signal	
Cable connector	Female connector 5 Pin M12
IP (locked condition)	67
Cable connector	Male connector 5 Pin M12
IP (locked condition)	67

Nennlichtstrom für eine einzelne Farbe - RGBW - 3000K				
N. Led	Rot	Grün	Blau	Weiß
36	108 lm	144 lm	72 lm	252 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 85-277 V | 36 topLED 5.4 W DC - 7 W AC | RGBW - 3000
C00584AMVDI

Single emission lines for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 36 topled LEDs with CCT of RGB-W 3000 K the source luminous flux is 576 lm, with a 106.7 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of glass - tempered with a anti-slip painting treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP68; the total weight is of 0.67 kg.

The total absorbed power is 5.4 W The power supply cable is included and features a 0.25 m length.


The device features protection class II and can be floor-mounted with an outer casing, code 99918(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	204 lm
Consumption	7 W
Leuchten Lichtausbeute	29 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

UGR	
UGR axial	21.8
UGR transversal	22
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	98°
Optik C0/C180	104°
Light distribution simmetry	Symmetrical 2 assis

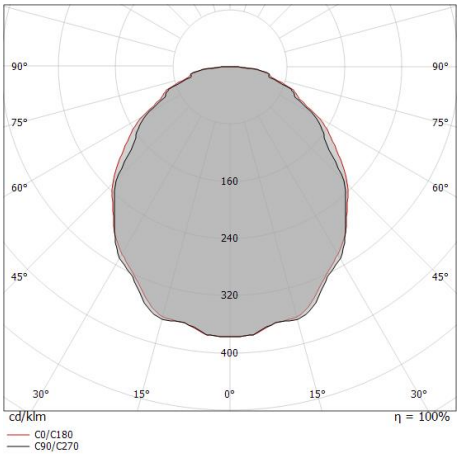

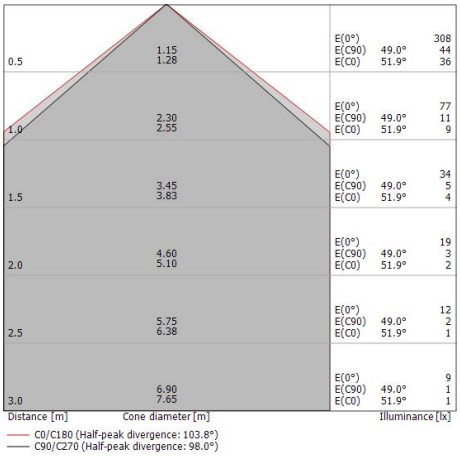

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Xenia_AL RGBW DMX | Lines | Accessories
C00584AMVDI



Federern für den Einbau

Code
99818






Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=529mm, H=78.7mm, D=71.1mm

Code
99918





Endkappe - Endkappen für Xenia - 2 Stück
Material:Aluminium, farbe:Grau, bearbeitungstyp :Lackierung.

Code
83188



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200013



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale.

Code
C-W200014



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200015



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200016



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale.

Code
C-W200017

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_AL RGBW DMX | Lines | Accessories
C00584AMVDI



Stecker
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

Code
C-W200018



Stecker
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

Code
C-W200019



Endkappe - Adapterkappe für DMX-Leitungsverschluss

Code
C-W400005

2x 

Schlüssel - Zubehör zur Demontage der Leuchte Xenia (2 Stück)
Material:Stahl AISI 304, farbe:Stahl.

Code
C-V500001

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.