
# Xenia_A PRO Micro Louvre



Lineare Elemente | 198-264 V
18 x powerLEDs 22.2 W DC - 26 W AC | CRI 80
**C00672AMAML**





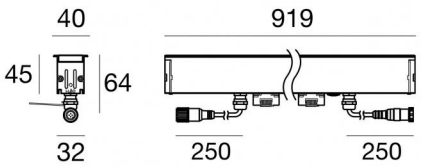


| Technische Daten | |
|---|---|
| Typ | Frame |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | powerLEDs |
| Optik | Medium Flood |
| Light emission direction | upward |
| Lampe Nennleistung | 22.2 W DC |
| Gesamtleistung | 26 W |
| Lichtstrom (Lichtquelle) | 2250 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 47 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2200 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 2 |
| IP | IP68 |
| Installationsbeschränkung | Nicht für Einsatz unter Wasser |
| IK | IK08 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Ja |
| Überrollbarkeit | 2000 Kg |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.25 m |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 1.535 Kg |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | Ja |
| Optiktechnologie | MicroLouvre |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Anodised aluminium |
| Bearbeitungstyp | Anodisierung 15 µm |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Extra-helles Glas - Gehärtet |
| Farbe | Transparent |
| Bearbeitungstyp | Siebdruck |

| Cables Electrification | |
|---|---|
| IP (locked condition) | 67 |
| Cable connector | Female Socket 4 Pin M12 |
| | |
| Cable connector | Male Plug 4 pin M12 |
| IP (locked condition) | 67 |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 198-264 V | 18 x powerLEDs 22.2 W DC - 26 W AC | CRI 80
**C00672AMAML**

Single emission lines for outdoor application. The ancient white LED light source is composed of 18 powerled LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 2250 lm, with a 101.4 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP68; the total weight is of 1.535 kg.

The total absorbed power is 26 W The power supply cable is included and features a 0.25 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 99914(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.


| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse F. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 43 % |
| Lichtstrom (Lichtquelle) | 2250 lm |
| Leuchten Lichtstrom | 973 lm |
| Consumption | 26 W |
| Leuchten Lichtausbeute | 37 lm/W |
| Farbtemperatur | 2200 K |
| Standard Deviation of Colour Matching | 1/16 ANSI BIN |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 214455h (at Tj 65  Ta 25 ) |
| L80 B10 C0 136355h (at Tj 65  Ta 25 ) |
| L90 B10 C0 67466h (at Tj 65  Ta 25 ) |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 34° |
| Light distribution simmetry | Asymmetrical |

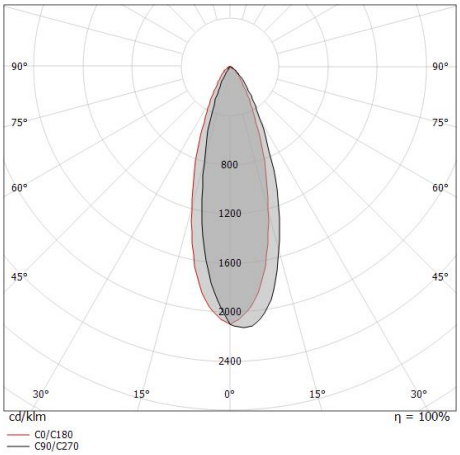

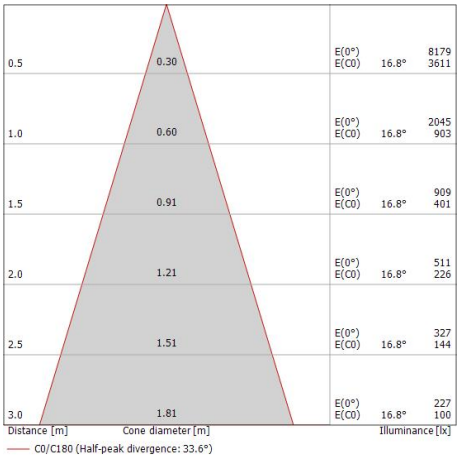


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_A PRO Micro Louvre | Lines | Accessories
**C00672AMAML**



Federern für den Einbau

**Code**
99818



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

**Code**
99216



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

**Code**
89190



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

**Code**
98437




Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.


**Code**
98149



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

**Code**
89188







Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=919mm, H=78.7mm, D=71.1mm

**Code**
99914






Endkappe - Endkappen für Xenia - 2 Stück
Material:Aluminium, farbe:Grau, bearbeitungstyp :Lackierung.

**Code**
83188



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_A PRO Micro Louvre | Lines | Accessories
**C00672AMAML**

2x 

Schlüssel - Zubehör zur Demontage der Leuchte Xenia (2 Stück)
Material:Stahl AISI 304, farbe:Stahl.

**Code**
C-V500001


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.