
# Xenia_AF PRO Micro Louvre



Lineare Elemente | 85-277 V
6 x powerLEDs 7.4 W DC - 9.5 W AC | CRI 80
**C00680AMAWW**





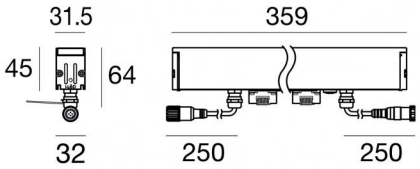


| Technische Daten | |
|---|---|
| Typ | Frameless |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | powerLEDs |
| Optik | Asymmetric Wallwasher |
| Light emission direction | upward |
| Lampe Nennleistung | 7.4 W DC |
| Gesamtleistung | 9.5 W |
| Lichtstrom (Lichtquelle) | 828 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 85 - 277 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2200 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 2 |
| IP | IP68 |
| Installationsbeschränkung | Nicht für Einsatz unter Wasser |
| IK | IK08 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Ja |
| Überrollbarkeit | 2000 Kg |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.25 m |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.51 Kg |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | 0.5 KV |
| Optiktechnologie | MicroLouvre |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Anodised aluminium |
| Bearbeitungstyp | Anodisierung 15 µm |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Extra-helles Glas - Gehärtet |
| Farbe | Transparent |
| Bearbeitungstyp | Siebdruck |

| Cables Electrification | |
|---|---|
| IP (locked condition) | 67 |
| Cable connector | Female Socket 4 Pin M12 |

| | |
|---|---|
| IP (locked condition) | 67 |
| Cable connector | Male Plug 4 pin M12 |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 85-277 V | 6 x powerLEDs 7.4 W DC - 9.5 W AC | CRI 80
**C00680AMAWW**

Single emission lines for outdoor application. The ancient white LED light source with a asymmetric wallwasher light distribution is composed of 6 powerled LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 828 lm, with a 111.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP68; the total weight is of 0.51 kg.

The total absorbed power is 9.5 W The power supply cable is included and features a 0.25 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 99912(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.


| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 31 % |
| Lichtstrom (Lichtquelle) | 828 lm |
| Leuchten Lichtstrom | 259 lm |
| Consumption | 9.5 W |
| Leuchten Lichtausbeute | 27 lm/W |
| Farbtemperatur | 2200 K |
| Standard Deviation of Colour Matching | 1/16 ANSI BIN |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 214455h (at Tj 65  Ta 25 ) |
| L80 B10 C0 136355h (at Tj 65  Ta 25 ) |
| L90 B10 C0 67466h (at Tj 65  Ta 25 ) |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 96° |
| Light distribution simmetry | Asymmetrical |

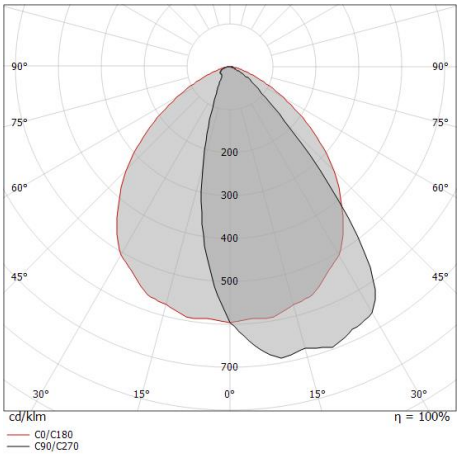

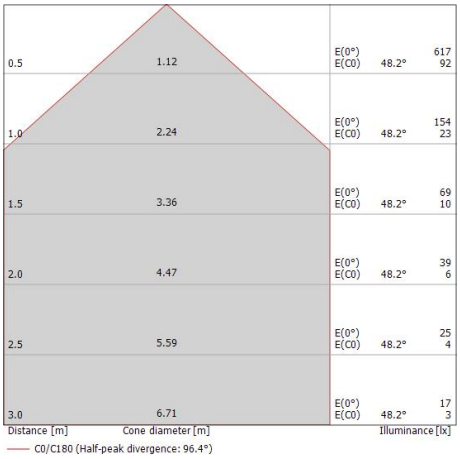


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_AF PRO Micro Louvre | Lines | Accessories
**C00680AMAWW**



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

**Code**
99216



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

**Code**
89190



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

**Code**
98437



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.


**Code**
98149



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

**Code**
89188






Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=359mm, H=78.7mm, D=71.1mm

**Code**
99912



Endkappe
Material:Aluminiumlegierung 6060, farbe:Aluminium.

**Code**
99917



Klammer
installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.


**Code**
98949



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_AF PRO Micro Louvre | Lines | Accessories
**C00680AMAWW**






Klammer
installationsposition: wand, decke L=52mm, H=43mm, D=75mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

**Code**
C-F400006




Schlüssel - Zubehör zur Demontage der Leuchte Xenia (2 Stück)
Material:Stahl AISI 304, farbe:Stahl.

**Code**
C-V500001



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.