
Vos_R Par16 EVO

Downlights | 220-240 V | 1xGU10
C00755BBEZZ



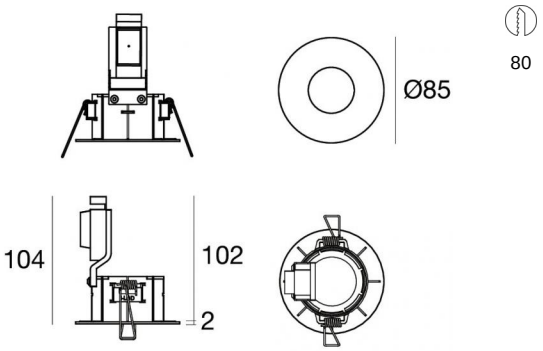

Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
Anschluss der Leuchte	1 x GU10 Max 15W
Light emission direction	downward
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	0.2 Kg

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 220-240 V | 1xGU10
C00755BBEZZ

Single emission recessed downlights for indoor application. Compatibility: LED lamp; lamp cap 1xGU10.

The device body is made of technopolymer and features a text black ral9005 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 0.2 kg.

The device features protection class II and can be ceiling-mounted, with a 80 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.