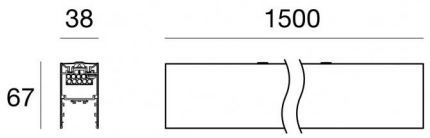
Systeme | 198-264 V AC /180-280 V DC
312 topLED 34.5 W DC - 38 W AC | Modular | CRI 90
**C00832BBWDZ**






| Technische Daten | |
|---|---|
| Typ | Pendelleuchte |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffused + No Optic |
| Light emission direction | downward and upward |
| Lampe Nennleistung | 34.5 W DC |
| Gesamtleistung | 38 W |
| Lichtstrom (Lichtquelle) | 5453 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 3000 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP20 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | DALI-2 - PUSH DIM |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Zweiflammig |
| Nettogewicht | 1.65 Kg |
| Modularity | Modular |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | 2 KV |
| Optiktechnologie | Dot free |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Text black RAL9005 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme | 198-264 V AC /180-280 V DC | 312 topLED 34.5 W DC - 38 W AC | Modular | CRI 90 | + C-U200002

**C00832BBWDZ**

Double emission systems for indoor application. The warm white LED light source with a diffused + no optic light distribution is composed of 312 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5453 lm, with a 158.1 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 1.65 kg.

The total absorbed power is 38 W

The device features protection class I and can be ceiling-mounted.

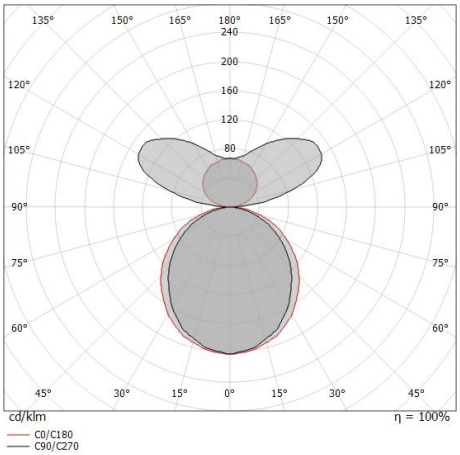
Compliant with the EN 60598-1 standard and its specific provisions.

| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 80 % |
| Lichtstrom (Lichtquelle) | 5453 lm |
| Leuchten Lichtstrom | 4373 lm |
| Consumption | 38 W |
| Leuchten Lichtausbeute | 115 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| **OPTICAL** | |
|---|---|
| Optik C90/C270 | 102° |
| Optik C0/C180 | 113° |
| Light distribution simmetry | Symmetrical 2 assis |






Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme | 198-264 V AC /180-280 V DC | 312 topLED 34.5 W DC - 38 W AC | Modular |
CRI 90 | + C-U200026

**C00832BBWDZ**

Double emission systems for indoor application. The warm white LED light source with a diffused + no optic light distribution is composed of 312 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5453 lm, with a 158.1 lm/W nominal luminous efficacy.

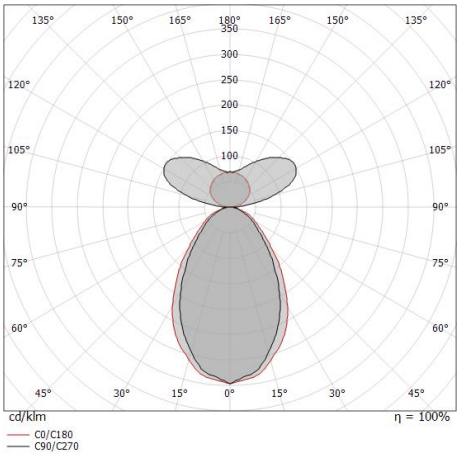
The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

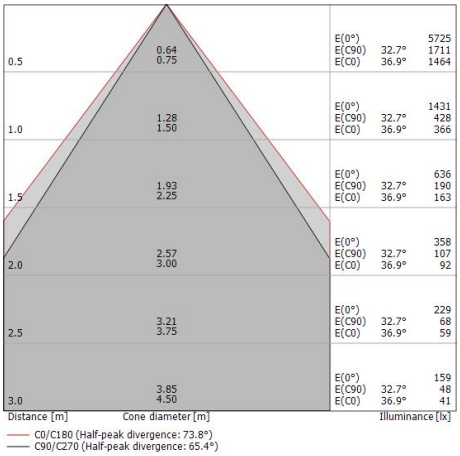
The ingress protection degree is IP20; the total weight is of 1.65 kg.

The total absorbed power is 38 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.




| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 75 % |
| Lichtstrom (Lichtquelle) | 5453 lm |
| Leuchten Lichtstrom | 4133 lm |
| Consumption | 38 W |
| Leuchten Lichtausbeute | 108 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |


| UGR | |
|---|---|
| UGR axial | 17.8 |
| UGR transversal | 18.7 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 65° |
| Optik C0/C180 | 74° |
| Light distribution simmetry | Symmetrical 2 assis |




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip35_MP | Systems | Accessories
**C00832BBWDZ**



Diffusor - Asymmetrisch - Länge 1.5m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200032



Diffusor - Blendschutzdiffusor UGR kleiner als 19 - Länge 1.5m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-U200035



Diffusor - Blendschutzdiffusor UGR kleiner als 19 - Länge 2m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-U200036



Diffusor - Blendschutzdiffusor UGR kleiner als 19 - Länge 3m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-U200037



Diffusor - Blendschutzdiffusor UGR weniger als 19 – Länge 5 m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-U200026



Diffusor - Blendschutzdiffusor UGR weniger als 19 – Länge 10m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Transparent.

**Code**
C-U200027


Diffusor - Asymmetrisch - Länge 2m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200033


Diffusor - Asymmetrisch - Länge 3m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200034



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip35_MP | Systems | Accessories
**C00832BBWDZ**





Diffusor - Asymmetrisch - Länge 5m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200006





Diffusor - Asymmetrisch - Länge 10m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.


**Code**
C-U200007





Diffusor - Opal - Länge 1.5m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200029


Diffusor - Opal - Länge 2m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.


**Code**
C-U200030






Diffusor - Opal - Länge 3m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200031



Diffusor - Opal – Länge 5 m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200002


Diffusor - Opal – Länge 10m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200003


Diffusor - Opal – Länge 20m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.


**Code**
C-U200004



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip35_MP | Systems | Accessories
**C00832BBWDZ**







Endkappe
Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
C-V400016






Drahtabdeckung
Material:Eisen, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
63301




Hängeleuchten - Enthält ein einzelnes Aufhängekabel (KIT). Für das Startmodul werden 2 KITS benötigt, für die weiteren Module 1 KIT pro Modul.
Material:Stahl, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

**Code**
C-F100021



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.