
Uplights | 1 arrayLED 25 W DC 24/48 V
RGBW - 2700
**C00922SAHSP**

MARINE GRADE

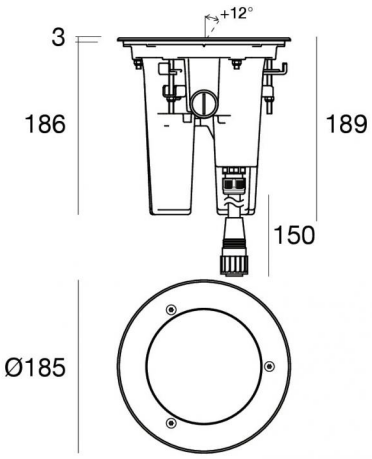


| Technische Daten | |
|---|---|
| Typ | Überrollbar |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | arrayLED |
| Optik | Spot |
| Light emission direction | upward |
| Lampe Nennleistung | 25 W DC |
| Lichtstrom (Lichtquelle) | 1415 lm |
| Ähnlichste Farbtemperatur / Tone | RGBW - 2700 K |
| Gleichstrom/Gleichspannung | CV |
| Isolierklasse | 3 |
| IP | IP68 |
| Installationsbeschränkung | Nicht für Einsatz unter Wasser |
| IK | IK10 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Nein |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DMX-RDM |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Ja |
| Gesamtwinkel (vertikale Ebene) | 12 ° |
| Begehbarkeit | Ja |
| Überrollbarkeit | 5000 Kg |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.15 m |
| Harzbeschichtung | Nein |
| Einbautiefe | 186 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 3 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Technische Merkmale des Produkts | Acquastop |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Matt black (R9005) |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Extra-helles Glas - Gehärtet |
| Farbe | Transparent |

| Oberfläche Oberfläche flansch | |
|---|---|
| Material | Edelstahl AISI 316 |
| Farbe | Stahl |
| Bearbeitungstyp | Bürsten |

**Elektronik**



99784
Switching Driver 180~295V AC / V DC (- art.)



C-E700026
DMX Controller (- art.)

| Cables Electrification+signal | |
|---|---|
| Cable connector | All-in-one |
| IP (locked condition) | 67 |

**Nennlichtstrom für eine einzelne Farbe - RGBW - 2700K**

| N. Led | Rot | Grün | Blau | Weiß |
|---|---|---|---|---|
| 1 | 392 lm | 496 lm | 95 lm | 432 lm |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Uplights | 1 arrayLED 25 W DC 24/48 V | RGBW - 2700
**C00922SAHSP**

Single emission uplights for outdoor application. The rgbw - 2700 k LED light source with a spot light distribution is composed of 1 arrayled LEDs with CCT of RGB-W 2700 K the source luminous flux is 1415 lm, with a 56.6 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body is made of die-cast aluminium en ab - 46100 and features a matt black (r9005) finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.The product flange is made of steel, a material that ensures high robustness, superior mechanical strength and extended durability, guaranteeing maximum component reliability over time.

The ingress protection degree is IP68; the total weight is of 3 kg.

The total absorbed power is 25 W The power supply cable is included and features a 0.15 m length.


The device features protection class III and can be floor-mounted with an outer casing, code 83328(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

| Illuminotechnical Eigenschaften | |
|---|---|
| Leuchten Lichtstrom | 1154 lm |
| Consumption | 33 W |
| Leuchten Lichtausbeute | 34 lm/W |
| Standard Deviation of Colour Matching | 5 Step MacAdam |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| UGR | |
|---|---|
| UGR axial | 15.7 |
| UGR transversal | 15.6 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 19° |
| Light distribution simmetry | Symmetrical |

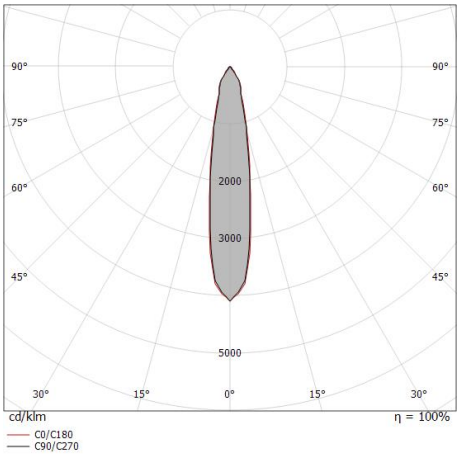

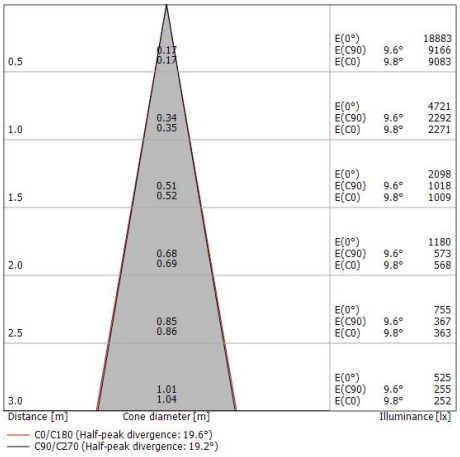






Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Suelo_RXJ | Uplights | Accessories
**C00922SAHSP**







Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=300mm, H=210mm, D=300mm.
Material:Kunststoff ABS, farbe:Black.

**Code**
83328






Zubehör für Außengehäuse - Gehäuseboden für Außengehäuse
Material:Verzinktes Eisen, farbe:Grau, bearbeitungstyp :Verzinken.

**Code**
83330






Lochschablone - Schablone zum Zementieren (Für Version mit bündigem Flansch)

**Code**
83331




Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm; farben: weiß - blau - rot - grau - braun - gelb-grün.

**Code**
98660




Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm; farben: weiß - blau - rot - grau - braun - gelb-grün.

**Code**
98661




Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm.

**Code**
98662




Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm.

**Code**
98663



Stecker - Steckverbinder für Parallelschaltung
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.


**Code**
C-W400004



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Suelo_RXJ | Uplights | Accessories
**C00922SAHSP**






Stecker - Start splitter

Typ Kabel power + signal cable allinone; Länge 5000 + 5000 + 200 mm; isolierung doppio con schermatura per segnale.

**Code**
98985






Stecker - Continuity splitter

Typ Kabel power + signal cable allinone; Länge 200 + 200 + 5000 mm; isolierung doppio con schermatura per segnale.

**Code**
99390



Stecker - DMX-Leitungsverschlussadapter für ALLinONE-Kabel

Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

**Code**
98986



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.