
Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80

**C01051BMMML**






| Technische Daten | |
|---|---|
| Typ | Überrollbar |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | powerLED |
| Optik | Medium Flood |
| Light emission direction | upward |
| Lampe Nennleistung | 3 W DC |
| Lichtstrom (Lichtquelle) | 432 lm |
| Eingangsspannungsbereich | 1000mA |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | CC |
| Isolierklasse | 3 |
| IP | IP68 |
| Installationsbeschränkung | Nicht für Einsatz unter Wasser |
| IK | IK09 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | Ja |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Ja |
| Überrollbarkeit | 2500 Kg |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Ja |
| Einbautiefe | 67 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.16 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Optiktechnologie | Ottica arretrata low glare |
| Technische Merkmale des Produkts | Acquastop - TVS |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6026 |
| Farbe | Anodised aluminium |
| Bearbeitungstyp | Anodisierung 20 µm |

| Oberfläche Oberfläche flansch | |
|---|---|
| Material | Messing OT58 |
| Farbe | Rohmessing |

**Elektronik**



C-E200011
On/Off Driver 220~240V AC / 176~276V DC (1 - 4 art.)



C-E200012
DALI-2 - 0-10V Controller (4 - 15 art.)

| Cables Electrification | |
|---|---|
| Cable connector | No connector - Neoprene 2x0.5mm² |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80
**C01051BMMML**

Single emission uplights for outdoor application. The super warm white LED light source with a medium flood light distribution is composed of 1 powerled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 432 lm, with a 144.0 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6026 and features a anodised aluminium finish, processed by means of 20 µm anodizing. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.


The ingress protection degree is IP68; the total weight is of 0.16 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99685(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

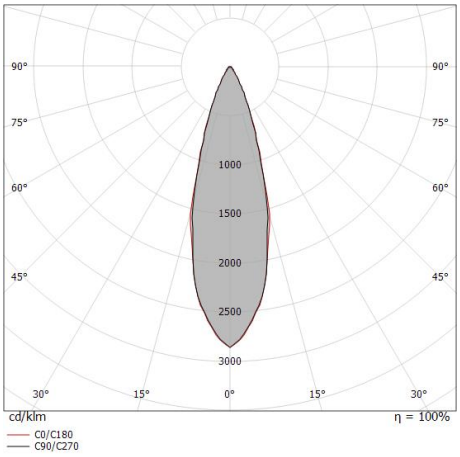

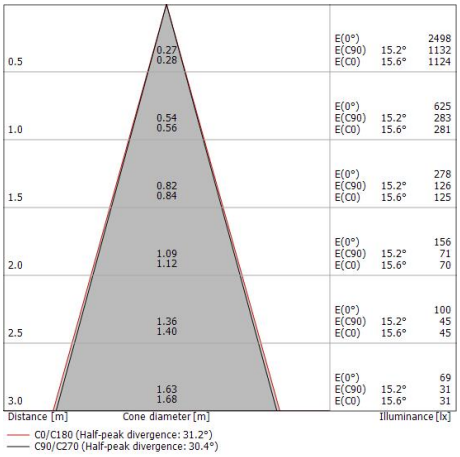
| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 50 % |
| Lichtstrom (Lichtquelle) | 432 lm |
| Leuchten Lichtstrom | 219 lm |
| Consumption | 3 W |
| Leuchten Lichtausbeute | 73 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 716641h (at Tj 65 Ta 25 ) |
| L80 B10 C0 445035h (at Tj 65 Ta 25 ) |
| L90 B10 C0 205461h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 24.2 |
| UGR transversal | 23.7 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 30° |
| Light distribution simmetry | Symmetrical |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Suelo_RX Pro | Uplights | Accessories
**C01051BMMML**






Einbaugehäuse

installationsposition: boden; typ installation: mauerwerk L=75mm, H=101mm, D=75mm.
Material:Kunststoff ABS, farbe:Black.

| Code |
| --- |
| 99685 |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.