
Poller & Mastaufsatzleuchten
198-264 V AC /176-276 V DC | 18 topLED 10.8 W DC - 12 W AC | CRI 90
C01269DBMDI







Technische Daten	
Typ	Poller & Mastaufsatzleuchten
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	10.8 W DC
Gesamtleistung	12 W
Lichtstrom (Lichtquelle)	1282 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP65
IK	IK07
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Emissione radiale
Nettogewicht	1.270 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Dark brown
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene

Oberfläche Oberfläche fassung	
Material	Aluminiumlegierung 6060
Farbe	Dark brown
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Poller & Mastaufsatzleuchten | 198-264 V AC /176-276 V DC | 18 topLED 10.8 W DC - 12 W AC | CRI 90

C01269DBMDI

Radial diffusion bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 18 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1282 lm, with a 118.7 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a dark brown finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of aluminium alloy 6060, with a dark brown finish, processed by means of coating.

The ingress protection degree is IP65; the total weight is of 1.270 kg.

The total absorbed power is 12 W

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	42 %
Lichtstrom (Lichtquelle)	1282 lm
Leuchten Lichtstrom	539 lm
Consumption	12 W
Leuchten Lichtausbeute	44 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

UGR	
UGR axial	17
UGR transversal	17.4
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	102°
Optik C0/C180	106°
Light distribution simmetry	Symmetrical 2 assis

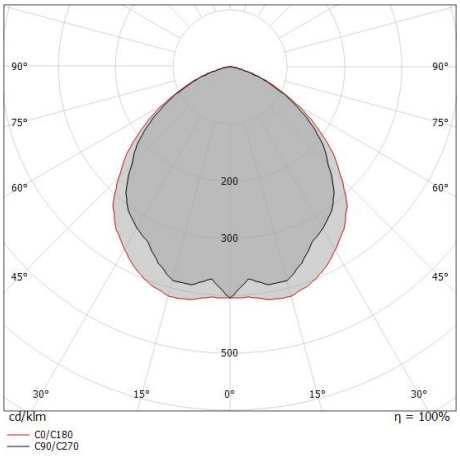

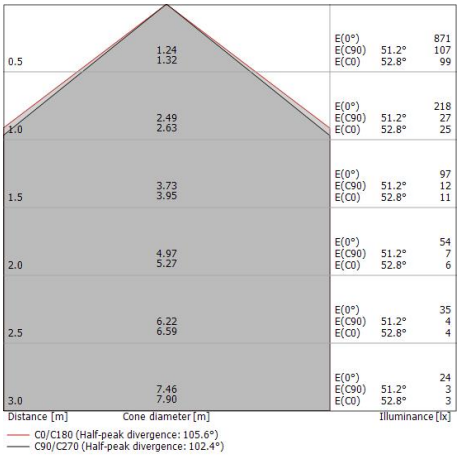


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Bond_Pro | Bollard & Pole | Accessories

C01269DBMDI





Erdspießen

installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code

14931

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.