

# Doge



Pendelleuchte | 220-240 V | 1xE27
**CA022AWHEZZ**





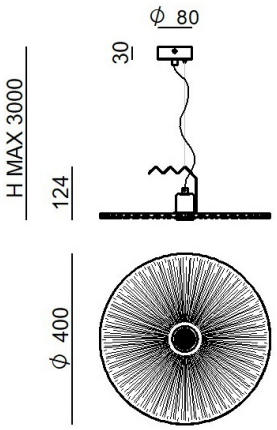


| Technische Daten | |
|---|---|
| Typ | Pendelleuchte |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Leuchtmittel inbegriffen | Nein |
| Anschluss der Leuchte | 1 x E27 Max 22W |
| Light emission direction | downward |
| Optik | Diffuses |
| Isolierklasse | 1 |
| IP | IP20 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 3 m |
| Harzbeschichtung | Nein |
| Nettogewicht | 1 Kg |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium |
| Farbe | Text white (R9003) |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Eisen |
| Farbe | Text white (R9003) |
| Bearbeitungstyp | Lackierung |

| Cables Electrification+suspension | |
|---|---|
| Max. Kabellänge | 3000 mm |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

# Doge



Pendelleuchte | 220-240 V | 1xE27
**CA022AWHEZZ**

Single emission pendant luminaires for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of aluminium and features a text white (r9003) finish, processed by means of coating; the mounting frame is made of iron, with a text white (r9003) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 1 kg.

The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.