
# Stilo_C



Downlights | 198-264 V
36 topLED 13 W DC - 15 W AC | CRI 90
**CA064DBEWDI**








60

| Technische Daten | |
|---|---|
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | downward and upward |
| Lampe Nennleistung | 13 W DC |
| Gesamtleistung | 15 W |
| Lichtstrom (Lichtquelle) | 1645 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 3000 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 2 |
| IP | IP20 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Phase cut |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Einbautiefe | 16 mm |
| Typ Lichtabstrahlung | Zweiflammig |
| Schutz vor elektrostatischen Entladungen | Ja |
| Schutz vor Stoßspannungen | 1 KV |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium |
| Farbe | Text peach (R3012) |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | PMMA |
| Farbe | Transparent |
| Bearbeitungstyp | Satinieren |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Aluminium |
| Farbe | Text peach (R3012) |
| Bearbeitungstyp | Lackierung |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 198-264 V | 36 topLED 13 W DC - 15 W AC | CRI 90
**CA064DBEWDI**

Double emission recessed downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 36 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1645 lm, with a 126.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text peach (r3012) finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a text peach (r3012) finish, processed by means of coating.

The ingress protection degree is IP20;

The total absorbed power is 15 W

The device features protection class II and can be ceiling-mounted, with a 60 mm diameter hole (in plasterboard).


Compliant with the EN 60598-1 standard and its specific provisions.


| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 91 % |
| Lichtstrom (Lichtquelle) | 1645 lm |
| Leuchten Lichtstrom | 1507 lm |
| Consumption | 15 W |
| Leuchten Lichtausbeute | 100 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 102000h (at Tj 115  Ta 25 ) |
| L90 B10 C0 55000h |

| UGR | |
|---|---|
| UGR transversal | 24 |
| UGR axial | 24 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 175° |
| Light distribution simmetry | Symmetrical |

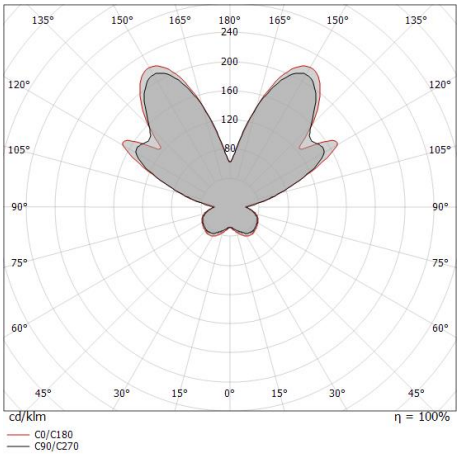

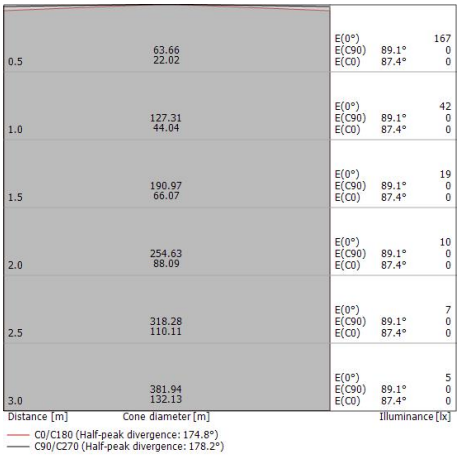






Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Stilo_C | Downlights | Accessories
**CA064DBEWDI**





Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

**Code**
KIT0026




Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi Radio-frequenza, 85-240V

**Code**
KIT0080



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.