
Systeme | 21 topLED 6 W DC 24 V | CRI 90

**CA111DCHMDI**








| Technische Daten | |
|---|---|
| Typ | Systeme |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | downward |
| Lampe Nennleistung | 6 W DC |
| Lichtstrom (Lichtquelle) | 678 lm |
| Frequency | 50-60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | CV |
| Isolierklasse | 3 |
| IP | IP20 |
| Glühdrahtprüfung | 650° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | Phase cut |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.67 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium |
| Farbe | Polished (galvanic) chrome |
| Bearbeitungstyp | Tampongalvanisieren |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | PMMA |
| Farbe | Transparent |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Aluminium |
| Farbe | Polished (galvanic) chrome |
| Bearbeitungstyp | Tampongalvanisieren |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme | 21 topLED 6 W DC 24 V | CRI 90
**CA111DCHMDI**

Single emission systems for indoor application. The super warm white LED light source with a diffused light distribution is composed of 21 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 678 lm, with a 113.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a polished (galvanic) chrome finish, processed by means of electroplating; the diffuser is made of pmma; the mounting frame is made of aluminium, with a polished (galvanic) chrome finish, processed by means of electroplating.

The ingress protection degree is IP20; the total weight is of 0.67 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6 W

The device features protection class III and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

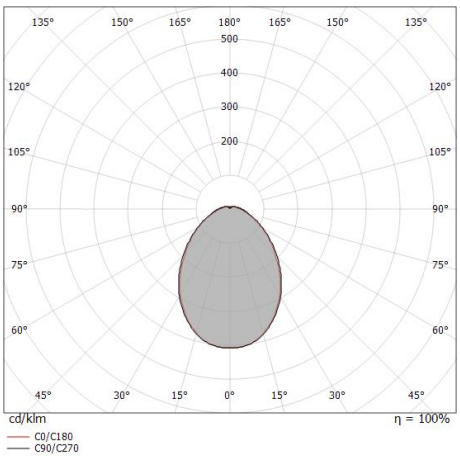
| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |

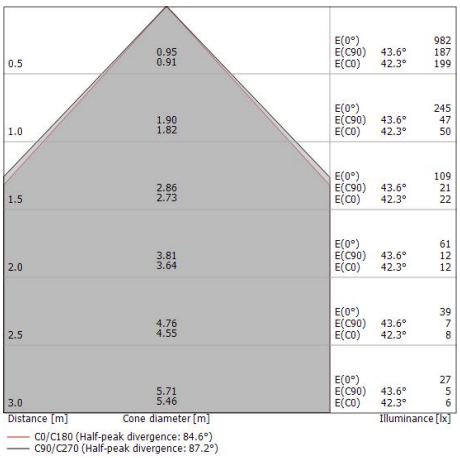
| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 88 % |
| Lichtstrom (Lichtquelle) | 678 lm |
| Leuchten Lichtstrom | 600 lm |
| Consumption | 6 W |
| Leuchten Lichtausbeute | 100 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Verbindungstemperatur (Leuchte) | 80 |
| Standardumgebungstemperatur | 25°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 102000h |
| L90 B10 C0 55000h |

| **UGR** | |
|---|---|
| UGR transversal | 21.9 |
| UGR axial | 22.2 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 85° |
| Light distribution simmetry | Symmetrical |








Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Sinfonia Sys. - Rossini_S | Systems | Accessories
**CA111DCHMDI**





Deckenrosette
Einschließlich Driver: Ja; Netzteil-Verwaltungsprotokoll: On/off; Maximale Leistung: 36W.
Material:Metall, farbe:Polished (galvanic) chrome , bearbeitungstyp :Tampongalvanisieren.

**Code**
CA103DCHEZZ





Deckenrosette
Einschließlich Driver: Ja; Netzteil-Verwaltungsprotokoll: On/off; Maximale Leistung: 75W.
Material:Metall, farbe:Polished (galvanic) chrome , bearbeitungstyp :Tampongalvanisieren.

**Code**
CA104DCHEZZ





Deckenrosette
Einschließlich Driver: Ja; Netzteil-Verwaltungsprotokoll: On/off; Maximale Leistung: 150W.
Material:Metall, farbe:Polished (galvanic) chrome , bearbeitungstyp :Tampongalvanisieren.

**Code**
CA105DCHEZZ





Drahtabdeckung
Material:Aluminium, farbe:Polished (galvanic) chrome , bearbeitungstyp :Tampongalvanisieren.

**Code**
CA106RCHEZZ





Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-V100005





Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-V100006




Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-V100007





Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-V100008




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Sinfonia Sys. - Rossini_S | Systems | Accessories
**CA111DCHMDI**





Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-F600004




Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-F600005





Befestigungsplatte
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-F600006





Hängeleuchten

**Code**
C-F100004




Befestigungssatz
Material:Eisen, farbe:Text black (R9005), bearbeitungstyp :Lackierung.

**Code**
C-F600003




Drahtabdeckung
Material:PC, farbe:Black.

**Code**
KIT0110



Kabel - Zusätzliches Anschlusskabel
Länge 1000 mm; isolierung singolo/doppio con schermatura.

**Code**
KIT0106



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.