
# Nido

Pendelleuchte | 198-264 V
240 topLED 35 W DC - 45 W AC | CRI 90
**CZ011DWTMDI**





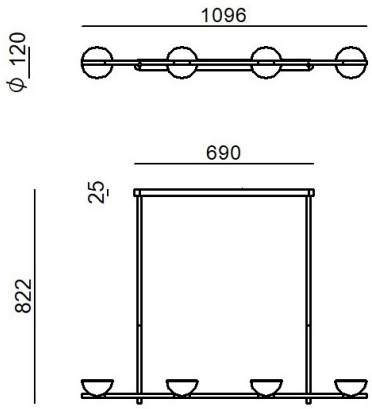


| Technische Daten | |
|---|---|
| Designer | Paolo Cappello |
| Jahr der Verwirklichung | 2026 |
| Typ | Pendelleuchte |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | downward and upward |
| Lampe Nennleistung | 35 W DC |
| Gesamtleistung | 45 W |
| Lichtstrom (Lichtquelle) | 4887 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP20 |
| Glühdrahtprüfung | 650° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Phase cut |
| Schwenkbarkeit | Orientabile |
| Gesamtwinkel (vertikale Ebene) | 350 ° |
| Gesamtwinkel (horizontale Ebene) | 0 ° |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Zweiflammig |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium |
| Farbe | Polished white (R9003)/text white (R9003) |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | PMMA |
| Farbe | Opal |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Aluminium |
| Farbe | Text white (R9003) |
| Bearbeitungstyp | Lackierung |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 198-264 V | 240 topLED 35 W DC - 45 W AC | CRI 90
**CZ011DWTMDI**

Double emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 240 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 4887 lm, with a 139.6 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a polished white (r9003)/text white (r9003) finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of aluminium, with a text white (r9003) finish, processed by means of coating.


The ingress protection degree is IP20;

The total absorbed power is 45 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

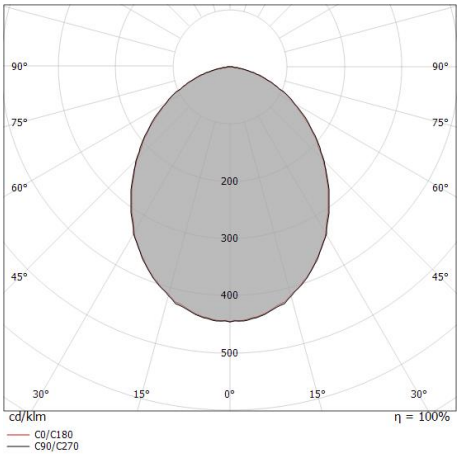

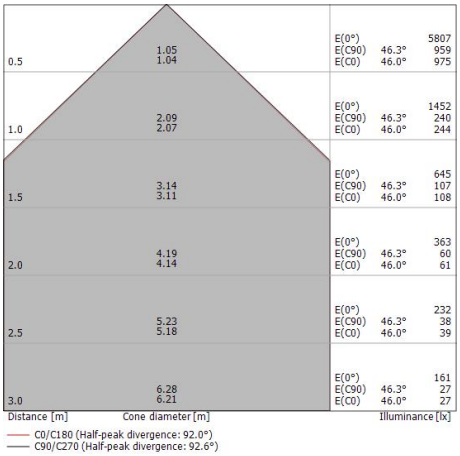
| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 66 % |
| Lichtstrom (Lichtquelle) | 4887 lm |
| Leuchten Lichtstrom | 3263 lm |
| Consumption | 45 W |
| Leuchten Lichtausbeute | 72 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Verbindungstemperatur (Leuchte) | 80 |
| Standardumgebungstemperatur | 25°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 102000h (at Tj 115  Ta 25 ) |
| L90 B10 C0 55000h |

| UGR | |
|---|---|
| UGR axial | 21.5 |
| UGR transversal | 21.7 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |


| OPTICAL | |
|---|---|
| Optik C0/C180 | 92° |
| Light distribution simmetry | Symmetrical |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Nido | Pendant Luminaires | Accessories
**CZ011DWTMDI**





Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi Radio-frequenza, 85-240V

**Code**
KIT0080




Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

**Code**
KIT0026



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.