
STILNOVO

# Mongolfier

Pendelleuchte | 198-264 V
1 topLED 29 W DC - 35 W AC | CRI 90
**CZ032DCPMDI**





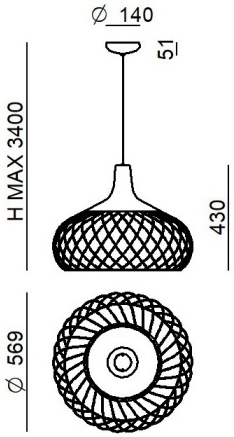


| Technische Daten | |
|---|---|
| Designer | Stilnovo |
| Jahr der Verwirklichung | 2016 |
| Typ | Pendelleuchte |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | downward |
| Lampe Nennleistung | 29 W DC |
| Gesamtleistung | 35 W |
| Lichtstrom (Lichtquelle) | 2436 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP20 |
| Glühdrahtprüfung | 650° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Phase cut |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 3 m |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Metall |
| Bearbeitungstyp | Tampongalvanisieren |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | PMMA |
| Bearbeitungstyp | Satinieren |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Metall |
| Bearbeitungstyp | Tampongalvanisieren |

| Cables Electrification+suspension | |
|---|---|
| Max. Kabellänge | 3000 mm |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 198-264 V | 1 topLED 29 W DC - 35 W AC | CRI 90
**CZ032DCPMDI**

Single emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2436 lm, with a 84.0 lm/W nominal luminous efficacy.


The device body is made of metal, processed by means of electroplating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of metal, processed by means of electroplating.


The ingress protection degree is IP20;

The total absorbed power is 35 W The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

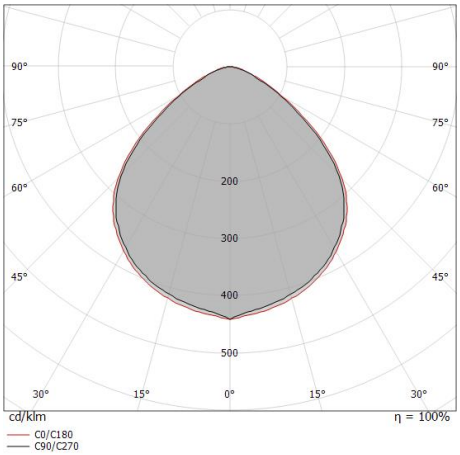

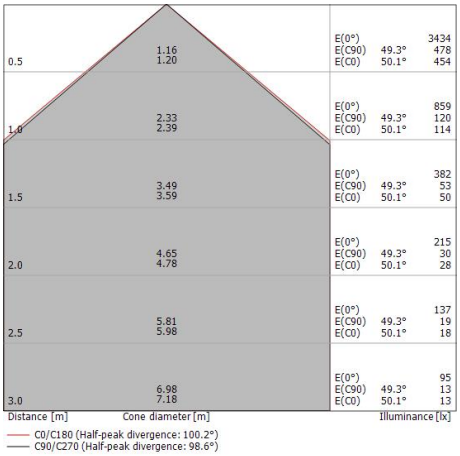
| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 79 % |
| Lichtstrom (Lichtquelle) | 2436 lm |
| Leuchten Lichtstrom | 1943 lm |
| Consumption | 35 W |
| Leuchten Lichtausbeute | 55 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 181000h (at Tj 105  Ta 25 ) |
| L80 B10 C0 159700h |
| L90 B10 C0 74560h |

| UGR | |
|---|---|
| UGR axial | 15.8 |
| UGR transversal | 16 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 99° |
| Light distribution simmetry | Symmetrical |




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Mongolfier | Pendant Luminaires | Accessories

**CZ032DCPMDI**








Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi Radio-frequenza, 85-240V

**Code**

KIT0080




Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe 220-240V

**Code**

KIT0026



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.